



Future Bus / Hard Metric Series

KLS1-HBC3 (2.00 Hard Metric male 180 & Type B)



UL approval

Material:

Housing: LCP UL94V-0
 Contacts: Male-Brass / Female-Phosphor Bronze
 Press-in force: 100N/pin Max
 Retention force: 20N/pin Min
 Current Rating: 1.5A at 20°C, 1.0A at 70°C
 Test Voltage: 750 Vrms
 Contact Resistance: 20m(ohm) Max
 Operating Temperature: -55°C~+125°C


Features:

- * Type B25 vertical male Connector provides signal contacts and optional shielding contacts respectively in 5+2 row x 25 position configuration.
- * Type B22 vertical male Connector provides signal contacts and optional shielding contacts respectively in 5+2 row x 22 position configuration.
- * Type B19 vertical male Connector provides signal contacts and optional shielding contacts respectively in 5+2 row x 19 position configuration.
- * All are end to end stackable without change in contact pitch.

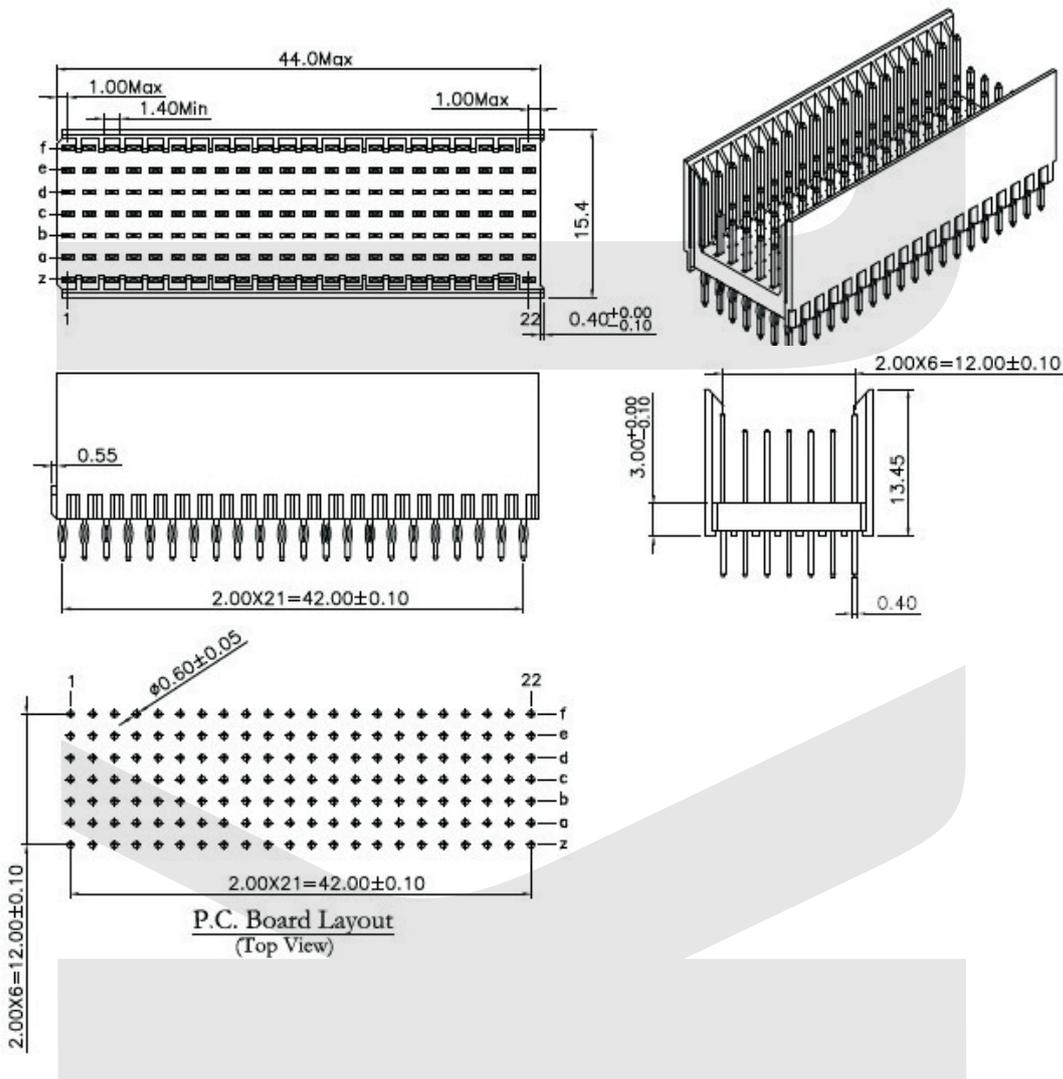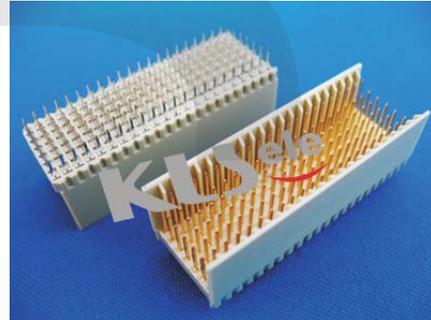




Part No.	Total Number	Row	Male Contact Options
<p>B-125-1A-0-30</p>	125	z a b c d e f	- A A A A A -
<p>B-125-1B-0-30</p>	125	z a b c d e f	- B B B B B -
<p>B-175-1A-1-30</p>	175	z a b c d e f	C A A A A A C
<p>B-175-1B-1-30</p>	175	z a b c d e f	C B B B B B C
<p>B-110-1A-0-30</p>	110	z a b c d e f	- A A A A A -
<p>B-110-1B-0-30</p>	110	z a b c d e f	- B B B B B -

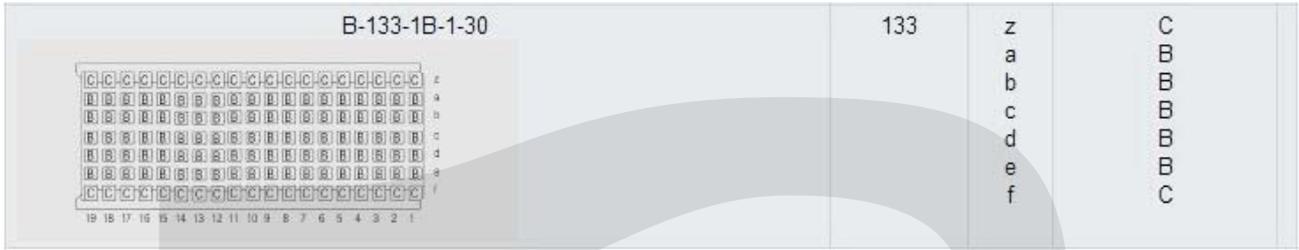

Any one row has more than one different length contact in it:

Male Contact Options

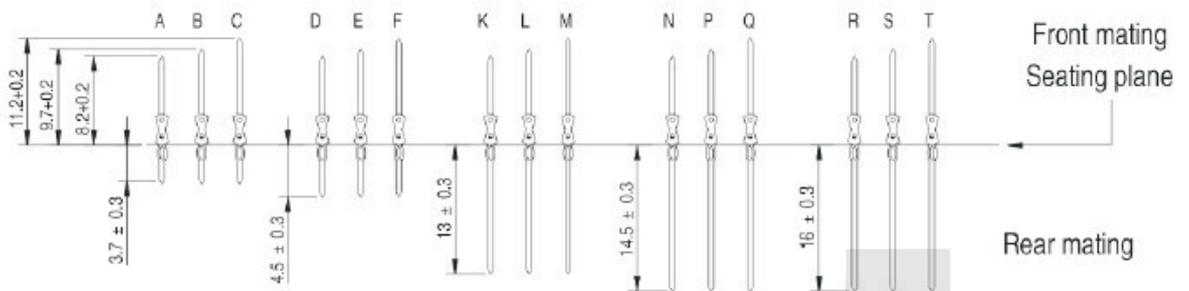

ORDER INFORMATION

HM7B-PP03BC-154-LF
LEADER