

# TERMINAL BLOCK Connector

## Pluggable Series

KLS2-EDLY-3.50/3.81 Series Pitch=3.50mm/3.81mm

### Electrical :



Rated voltage: 300V  
Rated current: 8A  
Contact resistance: 20mΩ  
Insulation resistance: 5000MΩ/1000V  
Withstanding Voltage: AC2000V/1Min

### Material

Pin header: Brass, Tin plated  
Housing: PA66, UL94V-0

### Mechanical

Temp. Range: -40°C~+105°C  
MAX Soldering: +250°C for 5 Sec

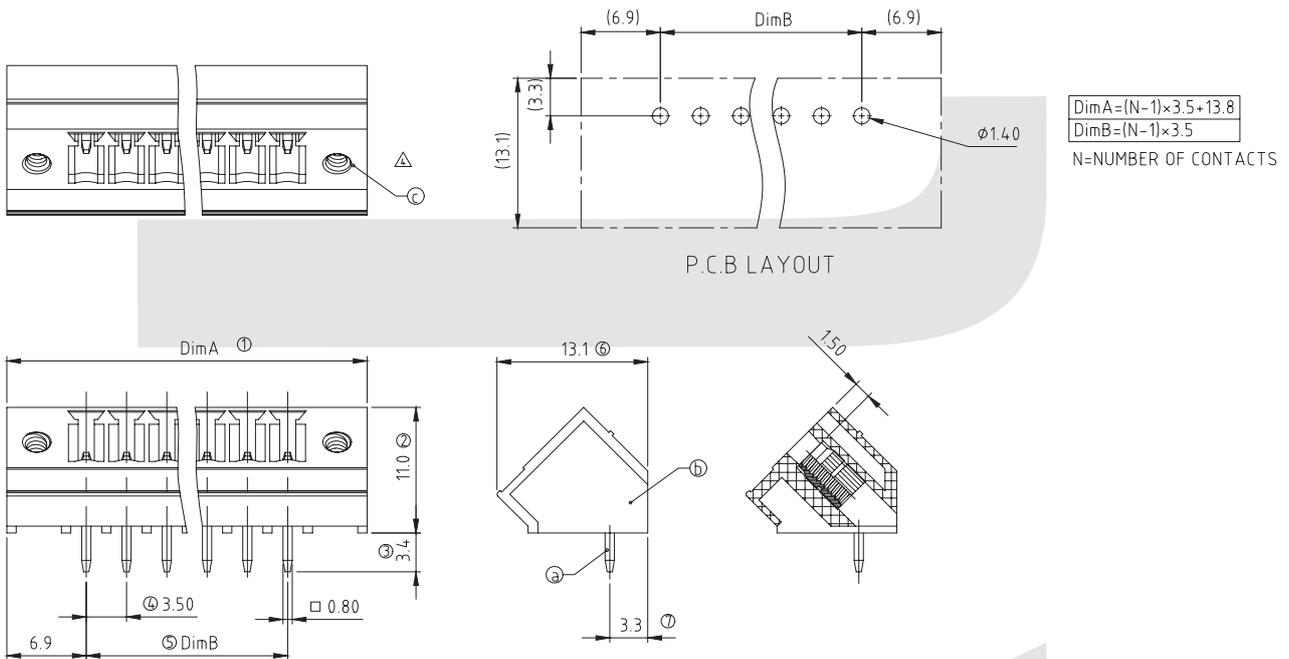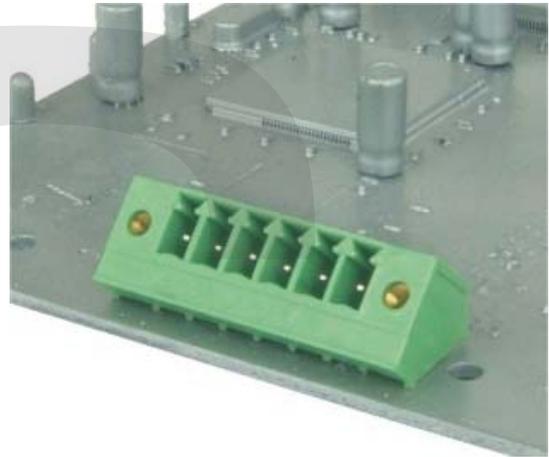

## ORDER INFORMATION

Product NO.: KLS2-EDLY-3.50-XXP X X

Pos. NO. \_\_\_\_\_  
 Series No. \_\_\_\_\_  
 Pitch: 3.50=3.50mm    3.81=3.81mm  
 Number of Pole \_\_\_\_\_  
 Customer Request \_\_\_\_\_  
 Color: 1=Gray    2=Blue    3=Black  
           4=Green    5=Orange    6=Red  
           7=Transparent    8=Yellow    9=White