


FUSE AND FUSE HOLDER

Φ6.35x32(30) Glass Tube Fuse Series


KLS5-1047/1048 Φ6.35x32 Glass Tube Fuse (Fast Blow) Series

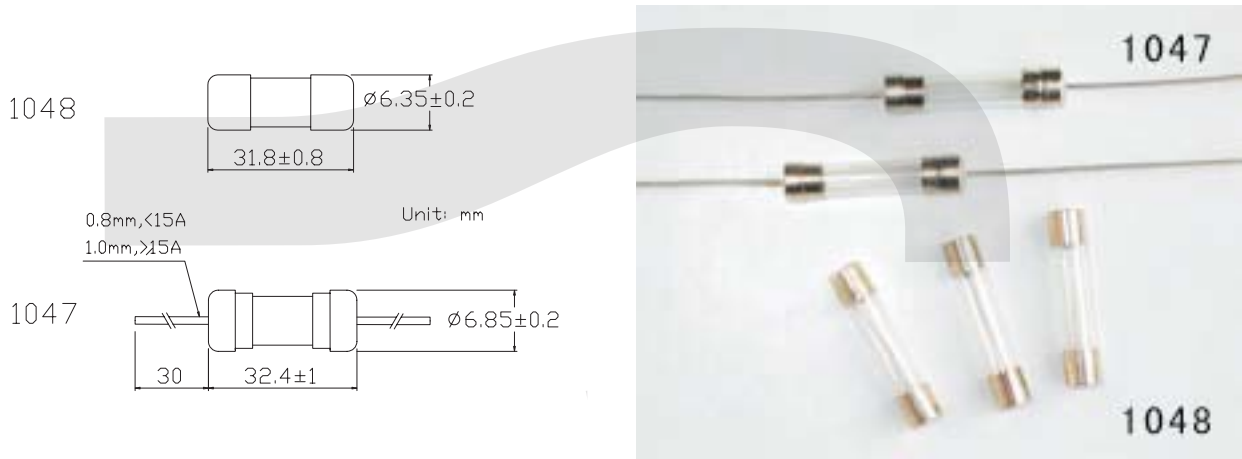

ELECTRICAL CHARACTERISTICS

Rating	Blowing TIME
100%	4 hour Min
135%	1 hour Max
200%	5 sec Max

Product Model	Rated Current	Rated Volta	Product Model	Rated Current	Rated Volta
1048-0100	100mA	125V/250V	1047-0100	100mA	125V/250V
1048-0125	125mA	125V/250V	1047-0125	125mA	125V/250V
1048-0150	150mA	125V/250V	1047-0150	150mA	125V/250V
1048-0160	160mA	125V/250V	1047-0160	160mA	125V/250V
1048-0200	200mA	125V/250V	1047-0200	200mA	125V/250V
1048-0250	250mA	125V/250V	1047-0250	250mA	125V/250V
1048-0300	300mA	125V/250V	1047-0300	300mA	125V/250V
1048-0315	315mA	125V/250V	1047-0315	315mA	125V/250V
1048-0350	350mA	125V/250V	1047-0350	350mA	125V/250V
1048-0400	40mA	125V/250V	1047-0400	40mA	125V/250V
1048-0500	500mA	125V/250V	1047-0500	500mA	125V/250V
1048-0600	600mA	125V/250V	1047-0600	600mA	125V/250V
1048-0700	700mA	125V/250V	1047-0700	700mA	125V/250V
1048-0750	750mA	125V/250V	1047-0750	750mA	125V/250V
1048-0800	800mA	125V/250V	1047-0800	800mA	125V/250V
1048-1000	1A	125V/250V	1047-1000	1A	125V/250V
1048-1200	1.2	125V/250V	1047-1200	1.2	125V/250V
1048-1250	1.25A	125V/250V	1047-1250	1.25A	125V/250V
1048-1500	1.5A	125V/250V	1047-1500	1.5A	125V/250V
1048-1600	1.6A	125V/250V	1047-1600	1.6A	125V/250V
1048-1800	1.8A	125V/250V	1047-1800	1.8A	125V/250V
1048-2000	2A	125V/250V	1047-2000	2A	125V/250V
1048-2500	2.5A	125V/250V	1047-2500	2.5A	125V/250V
1048-3000	3A	125V/250V	1047-3000	3A	125V/250V
1048-3150	3.15A	125V/250V	1047-3150	3.15A	125V/250V
1048-3500	3.5	125V/250V	1047-3500	3.5	125V/250V
1048-4000	4A	125V/250V	1047-4000	4A	125V/250V
1048-5000	5A	125V/250V	1047-5000	5A	125V/250V
1048-6000	6A	125V/250V	1047-6000	6A	125V/250V
1048-6300	6.3A	125V/250V	1047-6300	6.3A	125V/250V
1048-7000	7A	125V/250V	1047-7000	7A	125V/250V
1048-8000	8A	125V/250V	1047-8000	8A	125V/250V
1048-10000	10A	125V/250V	1047-10000	10A	125V/250V
1048-12000	12A	125V/250V	1047-12000	12A	125V/250V
1048-15000	15A	125V/250V	1047-15000	15A	125V/250V
1048-20000	20A	125V/250V	1047-20000	20A	125V/250V
1048-25000	25A	125V/250V	1047-25000	25A	125V/250V
1048-30000	30A	125V/250V	1047-30000	30A	125V/250V

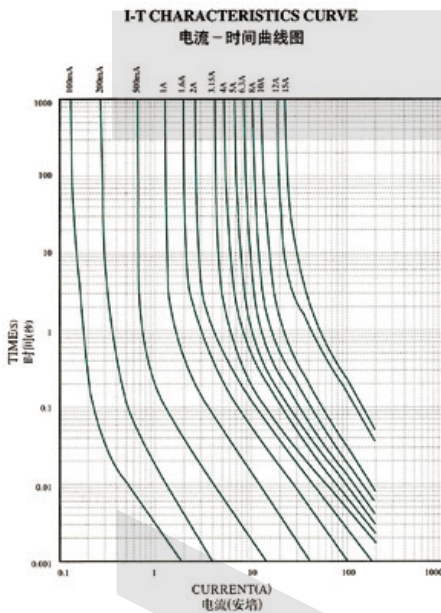

ORDER INFORMATION

Product NO.: KLS5-1047-XXXX

Rated Current
Lead Type:1047=With Lead 1048=No Lead
Part Number