


Terminals Series

KLS8-0601 Terminal insulating contact Series

Shell material: Nylon 66, 94V-2, certificated agree, by UL.
Usage: Peel the coat of wire, then insert to tube, use pincers fix them.

Feature: Nylon shell , long copper tube , easy to conduct electricity and hold wire tightly

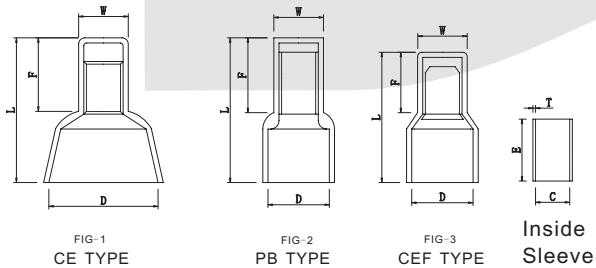


VIII

WIRE RANGE A. W. G. mm ²	ITEM NO.	Standard	DIMENSION inch (mm)							FIG	Q' TY BOX
			W	F	L	D	E	T	C		
22-16A. W. G. 1. 25mm ²	CE1	UL CSA	0.197 5	0.535 13.6	0.827 21	0.315 8	0.276 7	0.02 0.5	0.091 2.3	1	1000
16-14A. W. G. 2mm ²	CE2	UL CSA	0.217 5.5	0.547 13.9	0.827 21	0.315 8	0.276 7	0.018 0.45	0.122 3.1	1	1000
12-10A. W. G. 5. 5mm ²	CE5	UL CSA	0.295 7.5	0.575 14.6	1.004 25.5	0.394 10	0.295 7.5	0.028 0.7	0.157 4	1	500
8A. W. G. 8mm ²	CE8	UL CSA	0.37 9.4	0.709 18	1.173 29.8	0.472 12	0.335 8.5	0.049 1.25	0.173 4.4	1	250
22-16A. W. G. 1. 25mm ²	PB1	UL CSA	0.197 5	0.346 8.8	0.598 15.2	0.236 6	0.276 7	0.02 0.5	0.091 2.3	2	1000
16-14A. W. G. 2mm ²	PB2	UL CSA	0.228 5.8	0.346 8.8	0.598 15.2	0.248 6.3	0.276 7	0.018 0.45	0.122 3.1	2	1000
12-10A. W. G. 5. 5mm ²	PB5	UL CSA	0.287 7.3	0.346 8.8	0.701 17.8	0.362 9.2	0.295 7.5	0.028 0.7	0.157 4	2	500
8A. W. G. 8mm ²	PB8	UL CSA	0.37 9.4	0.465 11.8	0.866 22	0.465 11.8	0.315 8	0.049 1.25	0.197 5	2	250
22-16A. W. G. 1. 25mm ²	CEF2216		0.197 5	0.366 9.3	0.602 15.3	0.295 7.5	0.295 7.5	0.015 0.38	0.093 2.35	3	1000
16-14A. W. G. 2mm ²	CEF2214		0.224 5.7	0.398 10.1	0.728 18.5	0.315 8.2	0.295 7.5	0.014 0.35	0.118 3	3	1000
12-10A. W. G. 5. 5mm ²	CEF1810		0.311 7.9	0.378 9.6	0.787 20	0.402 10.2	0.335 8.5	0.016 0.4	0.197 5	3	500
8A. W. G. 8mm ²	CEF188		0.339 8.6	0.5 12.7	0.945 24	0.488 12.4	0.335 8.5	0.016 0.4	0.232 5.9	3	250
22-16A. W. G. 1. 25mm ²	CE1-		0.197 5	0.535 13.6	0.827 21	0.315 8	0.268 6.8	0.014 0.35	0.102 2.6	1	1000
16-14A. W. G. 2mm ²	CE2-		0.217 5.5	0.547 13.9	0.827 21	0.315 8	0.268 6.8	0.014 0.35	0.13 3.3	1	1000
12-10A. W. G. 5. 5mm ²	CE5-		0.295 7.5	0.575 14.6	1.004 25.5	0.394 10	0.287 7.3	0.018 0.45	0.177 4.5	1	500
8A. W. G. 8mm ²	CE8-		0.37 9.4	0.709 18	1.173 29.8	0.472 12	0.327 8.3	0.037 0.95	0.197 5	1	250
22-16A. W. G. 1. 25mm ²	PB1-		0.197 5	0.346 8.8	0.598 15.2	0.236 6	0.268 6.8	0.014 0.35	0.102 2.6	2	1000
16-14A. W. G. 2mm ²	PB2-		0.228 5.8	0.346 8.8	0.598 15.2	0.248 6.3	0.268 6.8	0.014 0.35	0.13 3.3	2	1000
12-10A. W. G. 5. 5mm ²	PB5-		0.287 7.3	0.346 8.8	0.701 17.8	0.362 9.2	0.287 7.3	0.018 0.45	0.177 4.5	2	500
8A. W. G. 8mm ²	PB8-		0.37 9.4	0.465 11.8	0.866 22	0.465 11.8	0.327 8.3	0.037 0.95	0.197 5	2	250

ORDER INFORMATION

KLS8- 0601 - CE1



All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information