


XLR CONNECTOR SERIES

KLS1-XLR-P07 (XLR Plug)

Electrical Specification:

- Number of contacts: 3
- Contact Resistance: ≤ 3 mOhms
- Insulation Resistance Initial: > 2 GOhms
- After Damp Heat Test: > 1 GOhms
- Dielectric Strength: 1500 V dc
- Rated current: 16 A
- Mechanical Lifetime: > 1000 cycles
- Insertion / Withdrawal Force: ≤ 20 N
- Cable O.D. Range: 4.0 mm - 8.0 mm
- Temperature Range: -30° C to $+ 80^{\circ}$ C

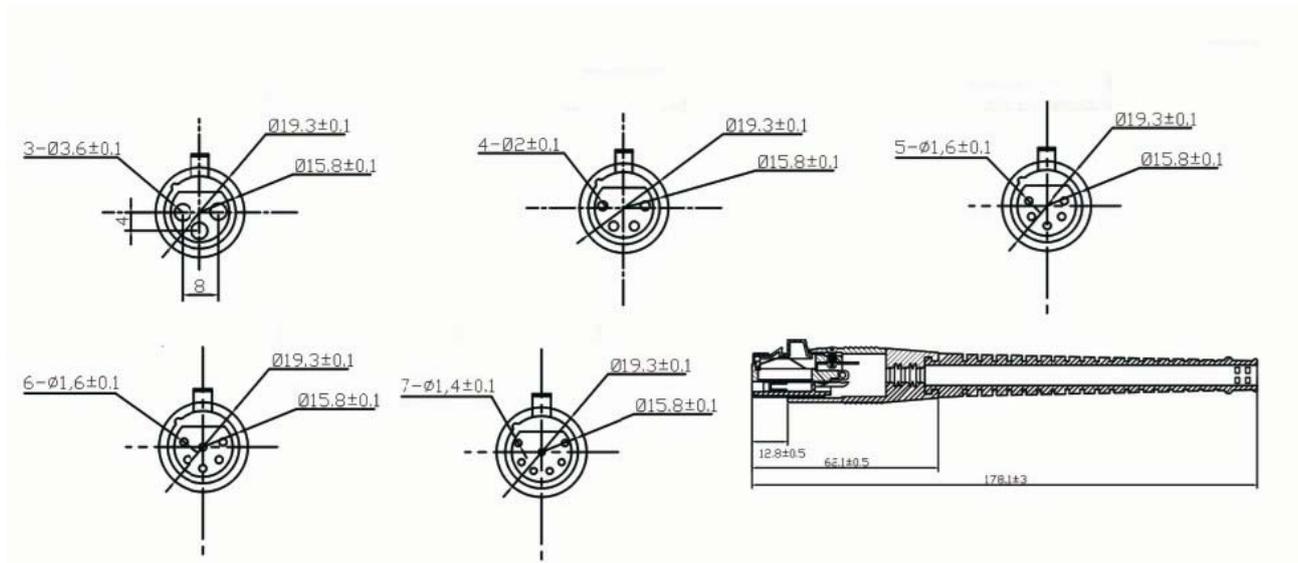

ORDER INFORMATION

Product NO.:KLS1-XLR-P07-03-F-B-T1




XLR CONNECTOR SERIES

KLS1-XLR-P07 (XLR Plug)

Electrical Specification:

- Number of contacts: 3
- Contact Resistance: ≤ 3 mOhms
- Insulation Resistance Initial: > 2 GOhms
- After Damp Heat Test: > 1 GOhms
- Dielectric Strength: 1500 V dc
- Rated current: 16 A
- Mechanical Lifetime: > 1000 cycles
- Insertion / Withdrawal Force: ≤ 20 N
- Cable O.D. Range: 4.0 mm - 8.0 mm
- Temperature Range: -30° C to $+ 80^{\circ}$ C

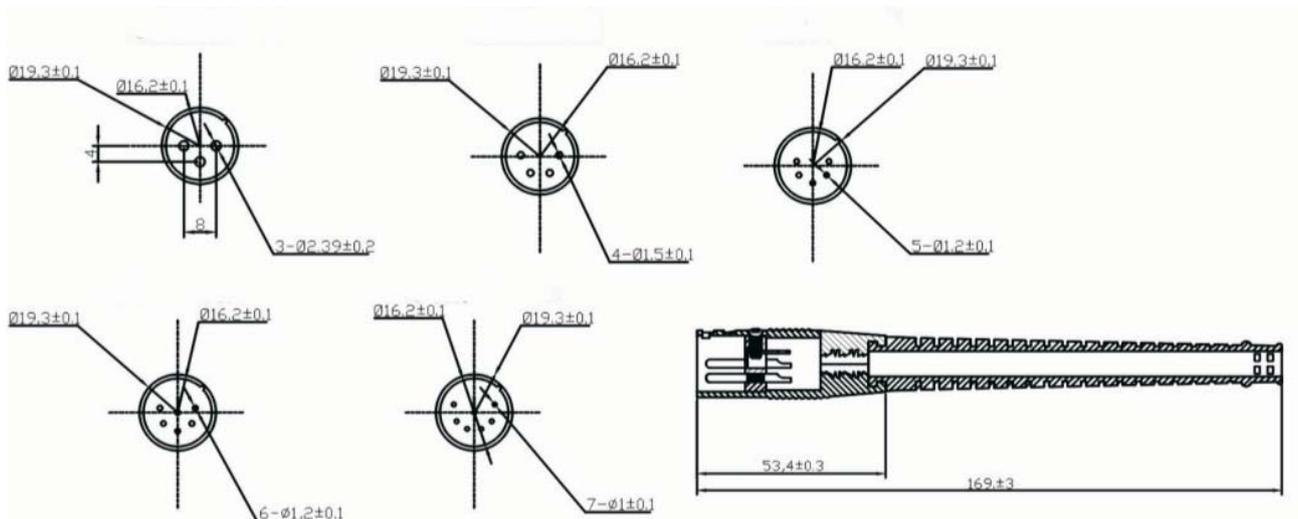

ORDER INFORMATION

Product NO.:KLS1-XLR-P07-03-M-B-T1




XLR CONNECTOR SERIES

KLS1-XLR-P07 (XLR Plug)

Electrical Specification:

- Number of contacts: 3
- Contact Resistance: ≤ 3 mOhms
- Insulation Resistance Initial: > 2 GOhms
- After Damp Heat Test: > 1 GOhms
- Dielectric Strength: 1500 V dc
- Rated current: 16 A
- Mechanical Lifetime: > 1000 cycles
- Insertion / Withdrawal Force: ≤ 20 N
- Cable O.D. Range: 4.0 mm - 8.0 mm
- Temperature Range: -30° C to $+80^{\circ}$ C

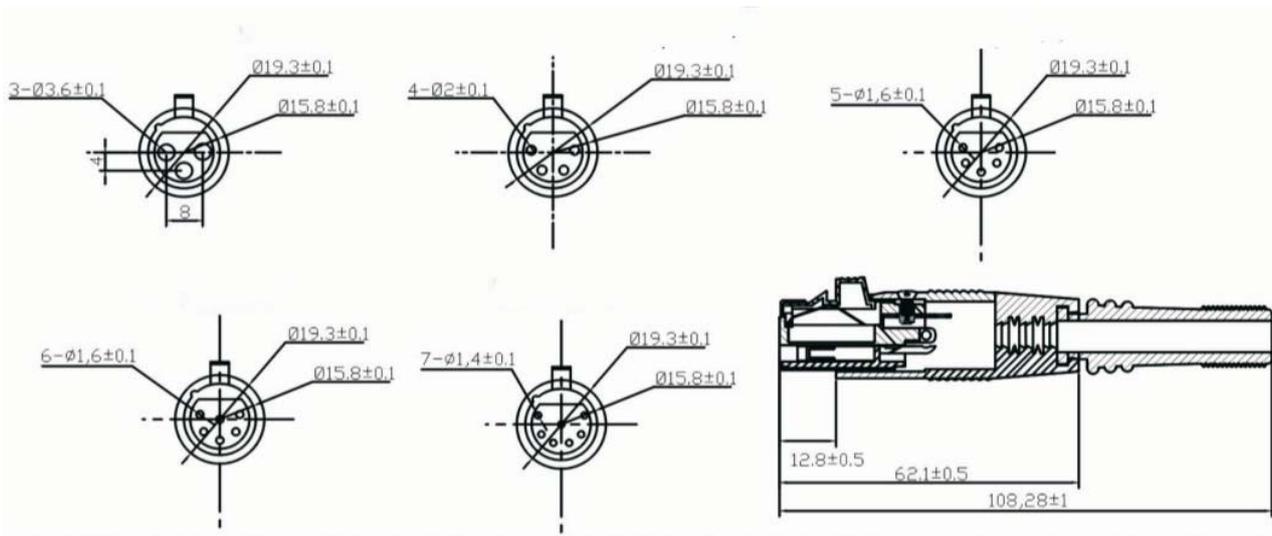

ORDER INFORMATION

Product NO.: KLS1-XLR-P07-03-F-B-T2




XLR CONNECTOR SERIES

KLS1-XLR-P07 (XLR Plug)

Electrical Specification:

- Number of contacts: 3
- Contact Resistance: ≤ 3 mOhms
- Insulation Resistance Initial: > 2 GOhms
- After Damp Heat Test: > 1 GOhms
- Dielectric Strength: 1500 V dc
- Rated current: 16 A
- Mechanical Lifetime: > 1000 cycles
- Insertion / Withdrawal Force: ≤ 20 N
- Cable O.D. Range: 4.0 mm - 8.0 mm
- Temperature Range: -30°C to $+80^{\circ}\text{C}$

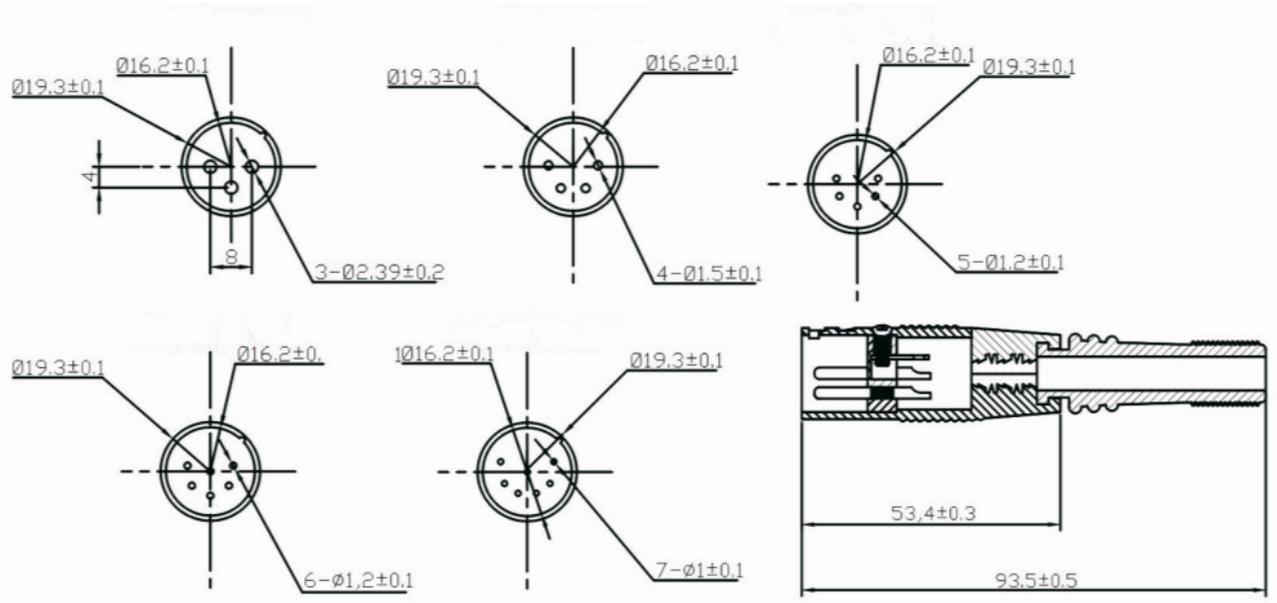

ORDER INFORMATION

Product NO.:KLS1-XLR-P07-03-M-B-T2




XLR Plug / XLR Socket Series

XLR CONNECTOR SERIES

KLS1-XLR-P07 (XLR Plug)

Electrical Specification:

- Number of contacts: 3
- Contact Resistance: ≤ 3 mOhms
- Insulation Resistance Initial: > 2 GOhms
- After Damp Heat Test: > 1 GOhms
- Dielectric Strength: 1500 V dc
- Rated current: 16 A
- Mechanical Lifetime: > 1000 cycles
- Insertion / Withdrawal Force: ≤ 20 N
- Cable O.D. Range: 4.0 mm - 8.0 mm
- Temperature Range: -30° C to $+80^{\circ}$ C

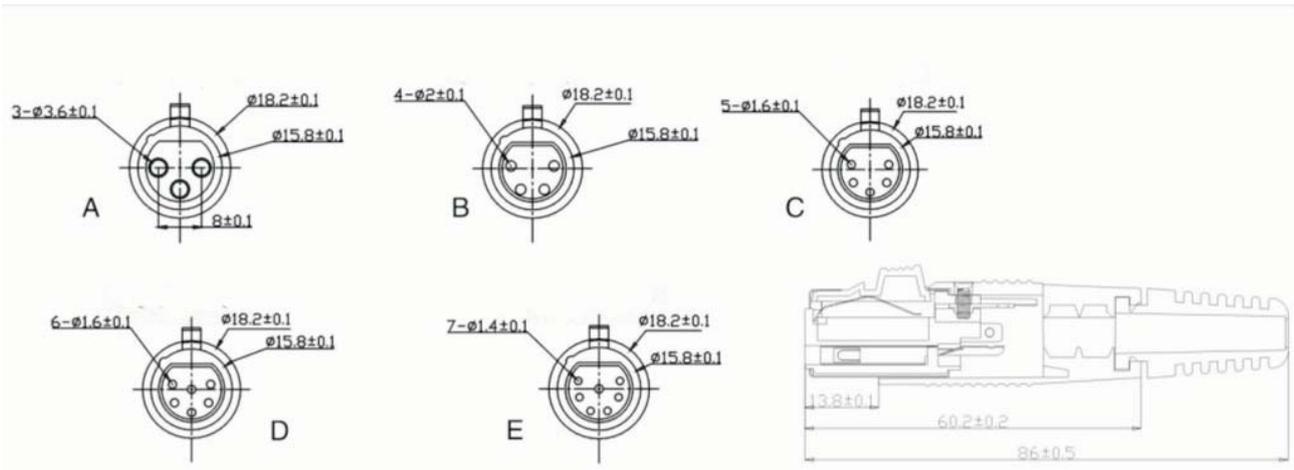

ORDER INFORMATION

Product NO.:KLS1-XLR-P07-03-F-B-T3




All specification & dimensions are subject to change, please call your nearest KLS sales representative for update information

XLR CONNECTOR SERIES

KLS1-XLR-P07 (XLR Plug)

Electrical Specification:

- Number of contacts: 3
- Contact Resistance: ≤ 3 mOhms
- Insulation Resistance Initial: > 2 GOhms
- After Damp Heat Test: > 1 GOhms
- Dielectric Strength: 1500 V dc
- Rated current: 16 A
- Mechanical Lifetime: > 1000 cycles
- Insertion / Withdrawal Force: ≤ 20 N
- Cable O.D. Range: 4.0 mm - 8.0 mm
- Temperature Range: -30° C to $+ 80^{\circ}$ C

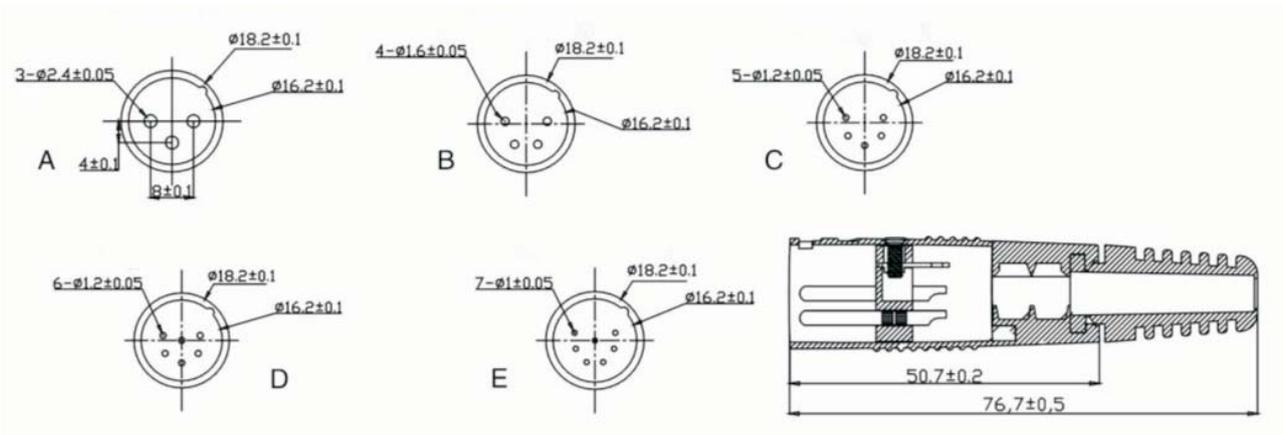

ORDER INFORMATION

Product NO.:KLS1-XLR-P07-03-M-B-T3

