


Rotary switches\* Coding switches


KLS7-RS41000 Terminal 4x1 type, 10 Position, BCD Circuit

**ELECTRICAL:**


- Switching Rating: 25mA 24V DC
- Non-Switching Rating: 100mA
- Dielectric Strength: AC 250V 1Minute
- Insulation Resistance: 1000MΩ MIM
- Contact Resistance: 1000MΩ Max.
- Operation Force: 500gf-cm Max.
- Operating Temperature: -25°C - +80°C
- Electrical Life: 20,000 Cycles
- Vibration: 10Hz-50Hz-10Hz for 6Hrs.

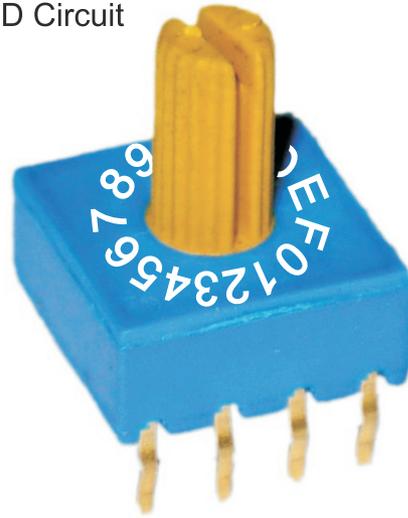

(1) Terminal 4x1 type 7mm

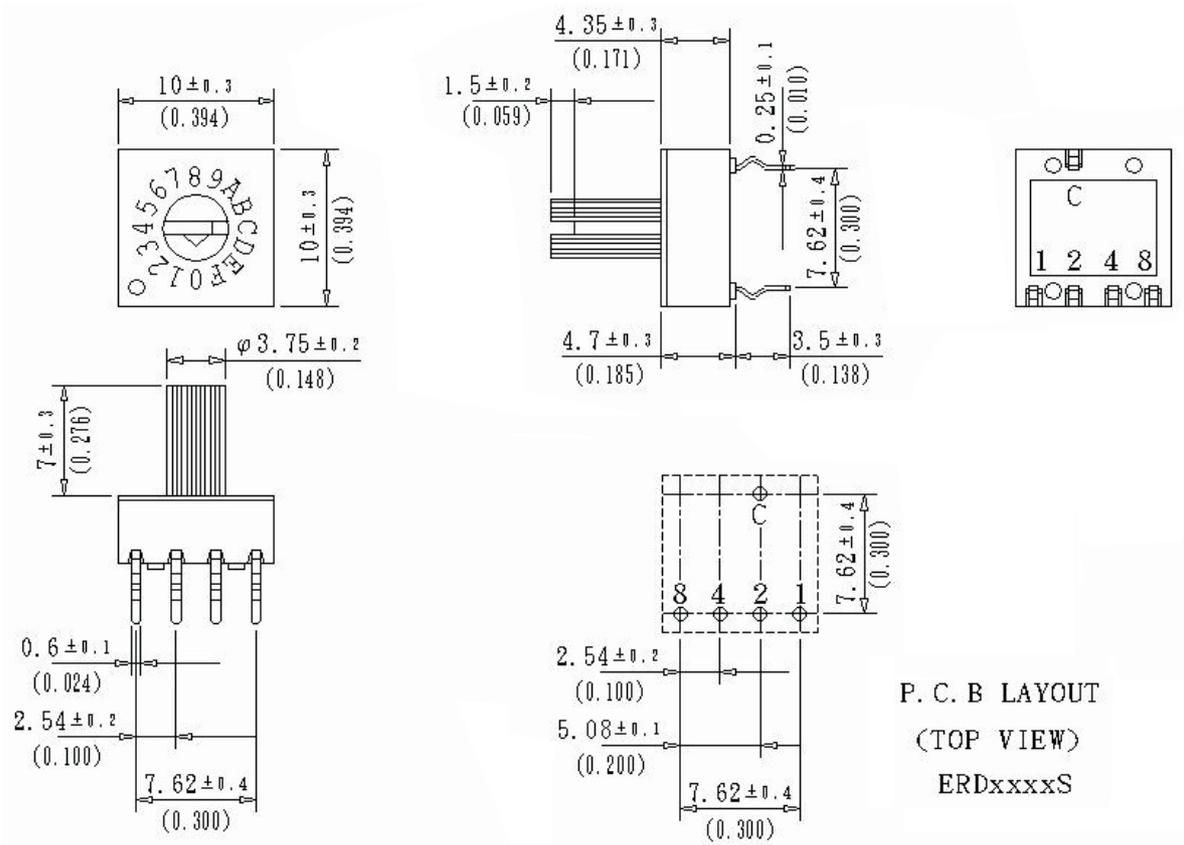

ORDER INFORMATION

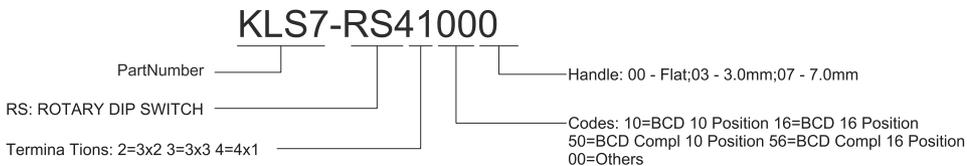

## Rotary switches\* Coding switches


KLS7-RS41000 Terminal 4x1 type, 10 Position, BCD Circuit

**ELECTRICAL:**

- Switching Rating: 25mA 24V DC
- Non-Switching Rating: 100mA
- Dielectric Strength: AC 250V 1Minute
- Insulation Resistance: 1000MΩ MIM
- Contact Resistance: 1000MΩ Max.
- Operation Force: 500gf-cm Max.
- Operating Temperature: -25°C - +80°C
- Electrical Life: 20,000 Cycles
- Vibration: 10Hz-50Hz-10Hz for 6Hrs.



( 2 ) Terminal type mm

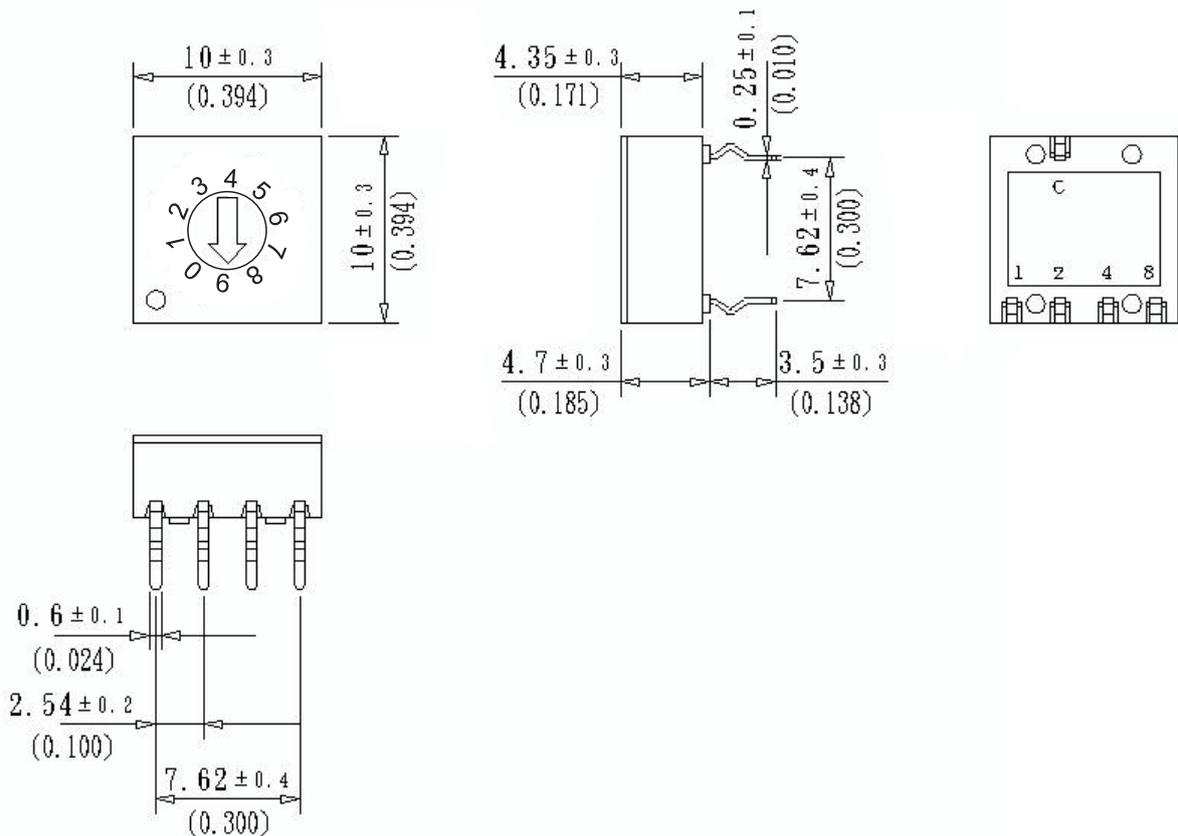

## ORDER INFORMATION

