



Terminal Block Connector

Pluggable MCS Terminal Blocks

KLS2-MPK-5.00 Series Pitch=5.00mm Female connectors

Notes:

- Maximum Current:16A
- Cross Section:2.5 mm²
- Wiring Range:0.2-2.5 mm²
- Rated Voltage:300V
- Rated Current:15A
- Cross section:AWG24-14
- Rated impulse withstand voltage:4 KV
- Pollution severity:3
- Insulation Material:PA

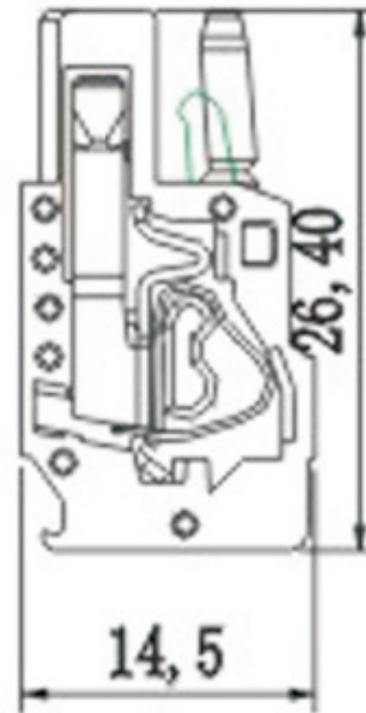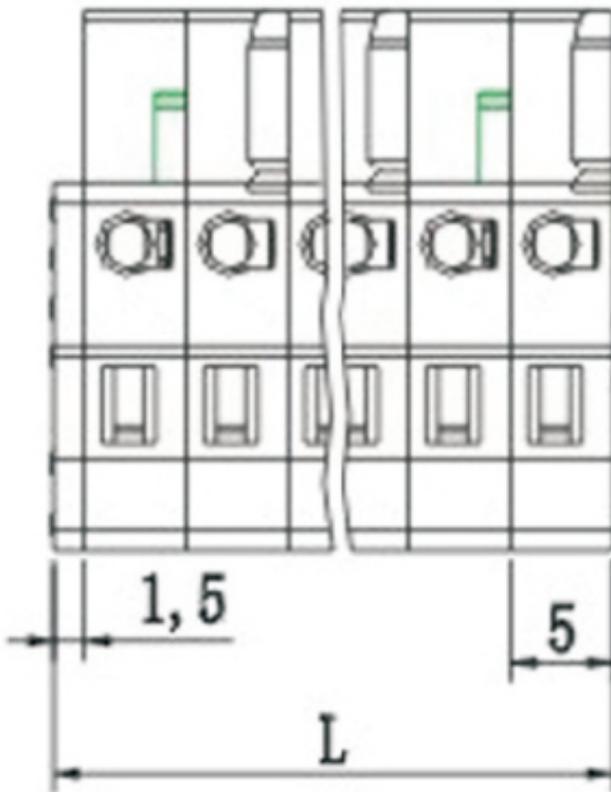

$L = P * 5.0 + 1.5 \text{mm}$

ORDER INFORMATION

Product NO.: KLS2-MPK-5.00-XX

Pos. NO.

Number of Pole(2~24)

Female connector

Pitch=5.00mm