


HHT1 Series Solid Voltage Regulator



Model and Description

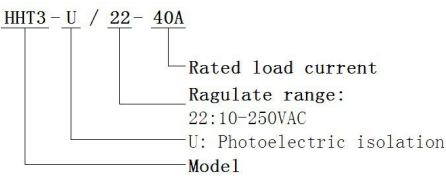

Specification

Dimension		106mm*75mm*31.5mm
Model		HHT3-U/22 10-100A
Description		Full-isolated Single phase Solid voltage regulator
Control mode		0-5VDC, 0-10VDC, 4-20mA
Load voltage		22VAC
Regulate range		22: 10-250VAC
Isolation voltage		Active type, full isolated
Off-state leakage current		≤10mA
Load current		10A, 20A, 30A, 40A, 100A
Instant voltage		22: 600VAC
On-state voltage drop		<1.6VAC
Dielectric strength		≥2000VAC
Insulation resistance		500mΩ(500VDC testing)
Ambient temperature		-30~80℃
Indicate methods		LED
Installation		Screw
Remarks		If load current> 10A ,a radiator is necessary, Carbon-film potentiometer should be with insulation button and shell
Packing	Inner box	1PCS/Paper box
	Outer box	30PCS
	CTN size	380mm*215mm*175mm
	Weight	10A≈390g, 1CTN/30PCS G.W: 13KG, N.W: 12KG 40A≈470g, 1CTN/30PCS G.W: 15.5KG, N.W: 14.5KG 100A≈540g, 1CTN/30PCS G.W: 17.5KG, N.W:16.5KG
Radiator (Optional)		HH060
		HH061
		HH062
		HH063

Wiring Diagram

