

HHS3-N□ Series Timer



Description

HHS3-N□(AH2-N□)




HHS3-Y□(AH2-Y□)



Specification


Model	HHS3-N□(AH2-N□)	HHS3-Y□(AH2-Y□)
Rated Supply Voltage	AC24V, 36V, 110V, 220V, 380V 50Hz, DC24V(Operating voltage fluctuation range: 85% to 110% Ue)	
Operating mode	Power on delay	
Time range	A: 1s/10s/1m/10m B: 3s/30s/3m/30m C: 6s/60s/6m/60m D: 1m/10m/1h/10h E: 3m/30m/3h/30h	
Repetitive error	Er≤1%	
Contact	A mode: 2C time delay B mode: 1C time delay output and 1C instantaneous output	
Rated Load of the Contact	3A AC220V(Resistive)	
Electrical Life	100000 operations min. (3 A at 250 VAC/30 VDC, resistive load)	
Installation	Surface mounting and 35mm DIN rail	Flush mounting

Wiring Diagram




Operation time sequence

A mode of HHS3-N□(AH2-N□) and HHS3-Y□(AH2-Y□)

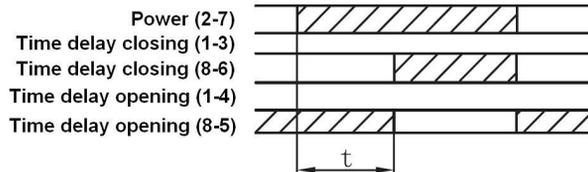


B mode of HHS3-N□(AH2-N□) and HHS3-Y□(AH2-Y□)




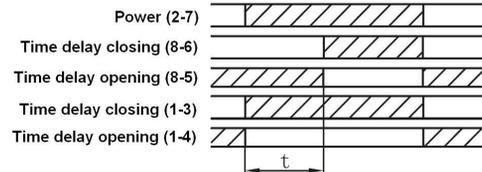


Dimension(mm) and Installation(mm)

HHS3-N□




HHS3-Y□




Application


Samples01



Samples02



Samples03



Samples04

