

Description

HHS4(JS14A, JS20)



HHS4-M(JS14A-M)



HHS4R(JSMJ)




Specification


| | | | | | |
|---------------------------|--|---|---------------|-------------------|--|
| Model | HHS4-□ | HHS4C-□ | HHS4G-□ | HHS4R-□ | HHS4F-□ |
| Rated Supply Voltage | AC24V, 36V, 110V, 220V, 380V 50Hz, DC24V(Operating voltage fluctuation range: 85% to 110% Ue) | | | | |
| Operating mode | Power on delay | Power on delay with instantaneous contact | Release delay | Circulation delay | Power off delay |
| Time range | 0.1s~1s, 0.5s~5s, 1s~10s, 3s~30s, 6s~60s, 12s~120s, 18s~180s, 30s~300s, 60s~600s, 90s~900s, 120s~1200s, 180s~1800s, 360s~3600s | | | | 0.1s~1s, 0.5s~5s, 1s~10s, 3s~30s, 6s~60s, 12s~120s, 18s~180s, |
| Repetitive error | The range of time delay > 1s, Er ≤ 1%, the range of time delay < 1s, Dr ≤ 50ms. | | | | The range of time delay > 1s, Er ≤ 5%, the range of time delay < 1s, Dr ≤ 100ms. |
| Contact | 2C time delay | 1C time delay and 1C instantaneous | | 2C time delay | |
| Rated Load of the Contact | 3A AC220V(Resistive) | | | | |
| Electrical Life | 100000 operations min. (3 A at 250 VAC/30 VDC, resistive load) | | | | |
| Installation | □=None: Surface mounting, DIN Rail mounting, □=M: Flush mounting, □=Y: External | | | | |

Wiring Diagram


HHS4, HHS4-M




HHS4G, HHS4G-M




HHS4F, HHS4F-M




HHS4-Y




HHS4G-Y, HHS4F-Y



HHS4C




HHS4R, HHS4R-M




Operation time sequence


HHS4

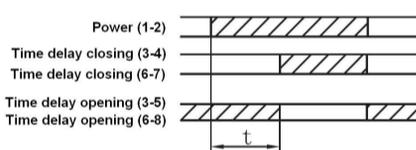


HHS4C

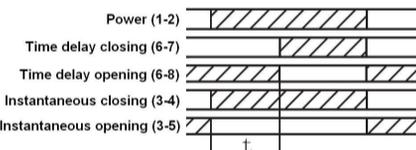


HHS4F

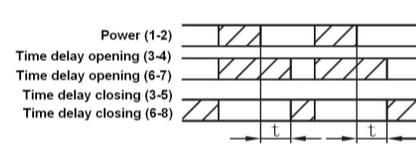

HHS4G

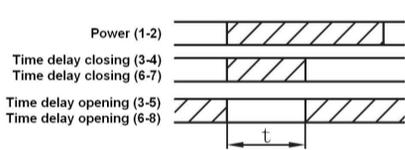


HHS4R, HHS4R-M

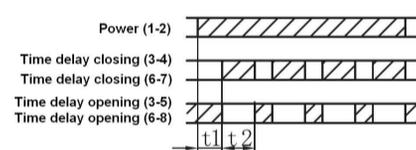


Dimension(mm) and Installation(mm)


Flush mounting

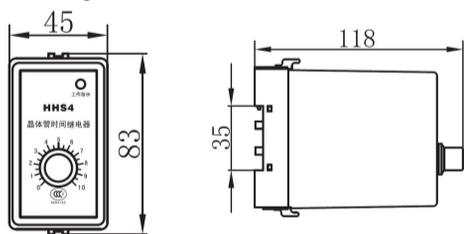


Surface mounting, DIN Rail mounting

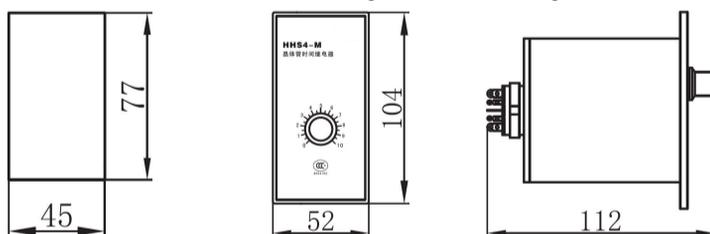

External

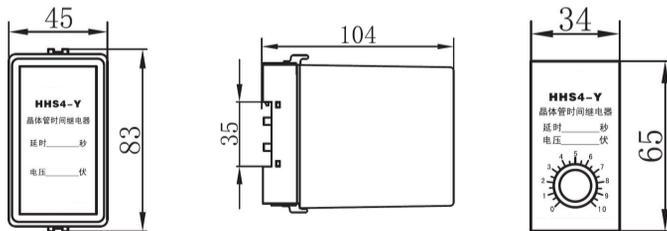


Mounting of Surface and External




Application


Samples01



Samples02



Samples03



Samples04

