

# HHS6 Series Timer




## Description




## Specification

Model	HHS6-1	HHS6P	HHS6-2	HHS6C-2	HHS6	HHS6-3	HHS6R
Rated Supply Voltage	AC24V, 36V, 110V, 220V, 380V 50Hz, DC24V(Operating voltage fluctuation range: 85% to 110% Ue)						
Display	Nixie tube	LED			Nixie tube		
Operating mode	Power on delay						Circulation delay
Time range	0.01s~99.99s, 1s~99m99s, 1m~99h99m						0.1s~990h
Repetitive error	Er≤1%						
Contact	1C time delay with Reset and Pause	2C time delay	1C time delay 1C instantaneous	2C time delay with Reset and Pause	1: 1C time delay 2: 2C time delay		
Rated Load of the Contact	3A AC220V(Resistive)						
Electrical Life	100000 operations min. (3 A at 250VAC/30VDC, resistive load)						
Installation	Flush mounting, 35mm DIN Rail mounting						

## Wiring Diagram

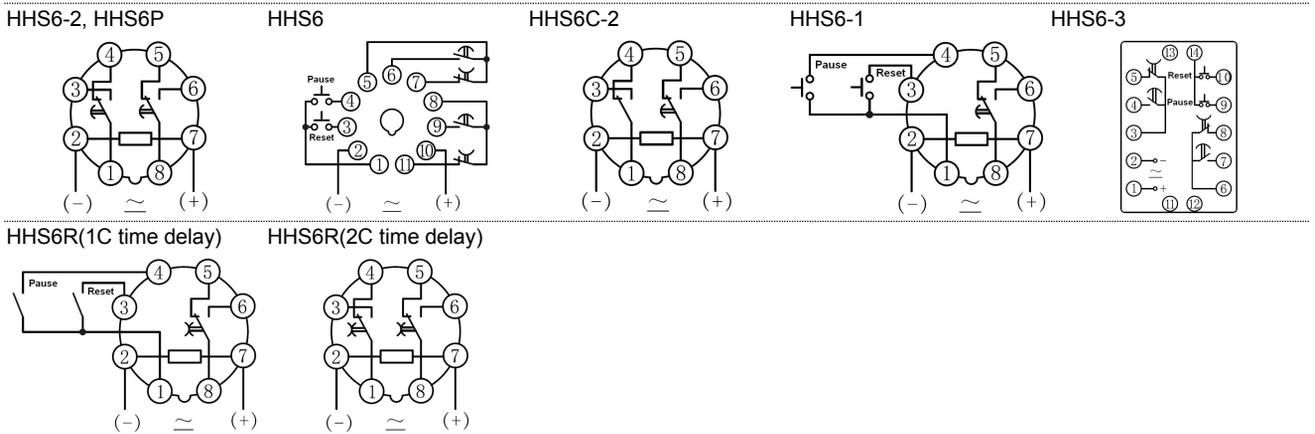

## Dimension(mm) and Installation(mm)

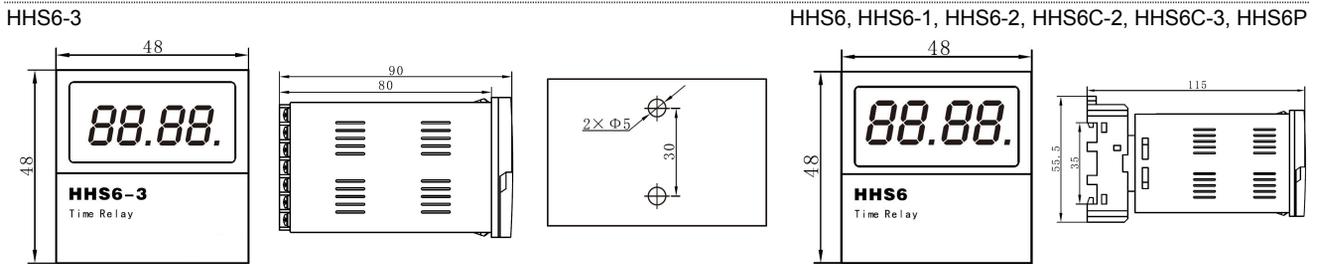

## Application

