

Description

HHS8(AH3-2), HHS8C(AH3-3, ST2P), HHS8G


HHS8-N□(AH3-N□)



Specification


Model	HHS8-1(AH3-1)	HHS8(AH3-2)	HHS8C(AH3-3)	HHS8G(AH3-2)	HHS8-N□(AH3-N□)
Rated Supply Voltage	AC24V, 36V, 110V, 220V, 380V 50Hz, DC24V(Operating voltage fluctuation range: 85% to 110% Ue)				
Operating mode	Power on delay	Power on delay	Power on delay with instantaneous contact	Release delay	Power on delay
Time range	1s, 3s, 5s, 10s, 30s, 60s, 3m, 5m, 10m, 30m, 60m, 3h, 5h, 10h, 12h				NA: 1s/10s/1m/10m NB: 3s/30s/3m/30m NC: 6s/60s/6m/60m ND: 1m/10m/1h/10h NE: 3m/30m/3h/30h
Repetitive error	Er ≤ 1%				
Contact	1C time delay	2C time delay	1C time delay and 1C instantaneous	2C time delay	A mode: 2C time delay B mode: 1C time delay and 1C instantaneous
Rated Load of the Contact	3A AC220V(Resistive)				
Electrical Life	100000 operations min. (3 A at 250 VAC/30 VDC, resistive load)				
Installation	With different socket: Surface mounting or DIN Rail mounting				

Wiring Diagram

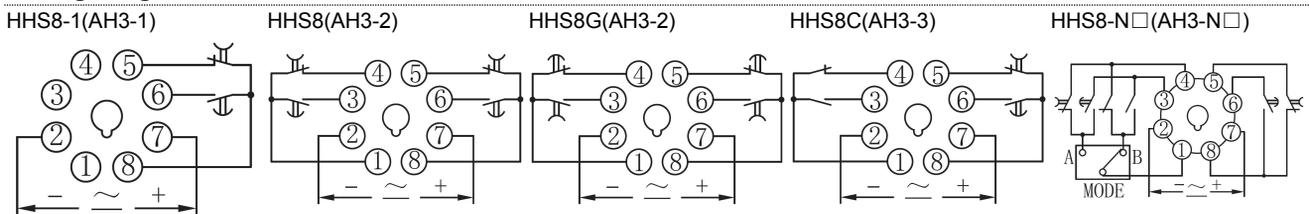


Operation time sequence

HHS8(AH3-2), HHS8-N□(AH3-N□) A mode HHS8C(AH3-3), HHS8-N□(AH3-N□) A mode HHS8-1(AH3-1)

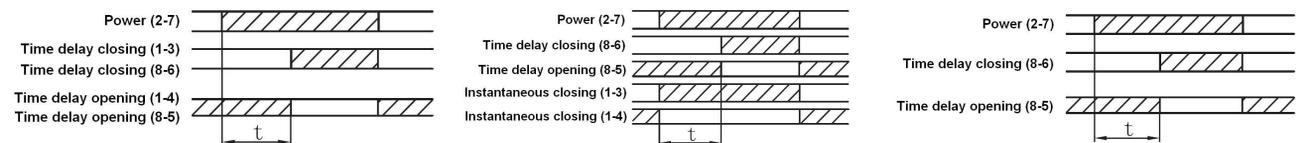




HHS8G(AH3-2 Release delay)

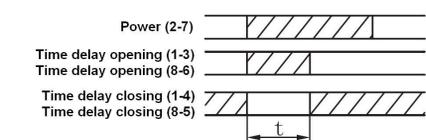

Dimension(mm) and Installation(mm)


HHS8-N□(AH3-N□)

HHS8-1(AH3-1), HHS8(AH3-2), HHS8C(AH3-3), HHS8G(AH3-2)

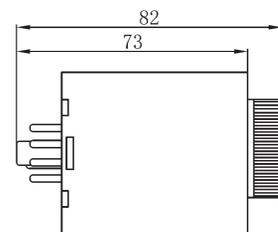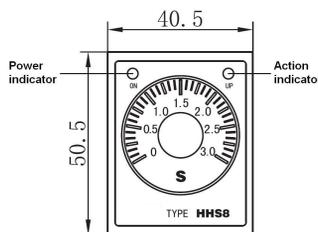


Application


Samples01

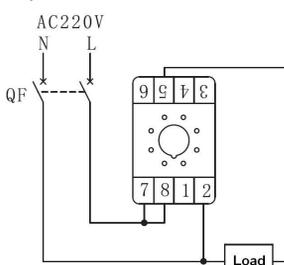

Samples02

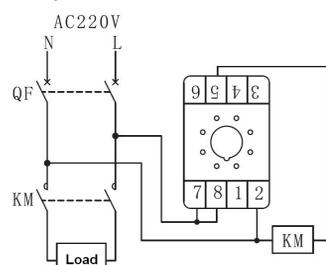

Samples03

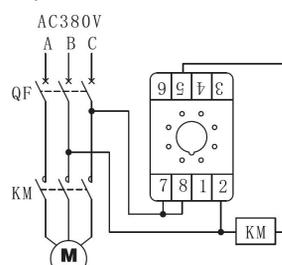

Samples04

