

Description

HHS15




Specification


| | | |
|---------------------------|--|---------------|
| Model | HHS15 | HHS15-G |
| Rated Supply Voltage | AC24V, 36V, 110V, 220V, 380V 50Hz, DC24V (Operating voltage fluctuation range: 85% to 110% Ue) | |
| Operating mode | Power on delay | Release delay |
| Time range | 0.01s~99.99s, 1s~99m99s, 1m~99h99m | |
| Repetitive error | The range of time delay > 1s, $Er \leq 1\%$, the range of time delay < 1s, $Dr \leq 50ms$. | |
| Contact | 2C time delay with Start function | |
| Rated Load of the Contact | 3A AC220V(Resistive) | |
| Electrical Life | 100000 operations min. (3 A at 250 VAC/30 VDC, resistive load) | |
| Installation | Flush mounting | |

Wiring Diagram

HHS15

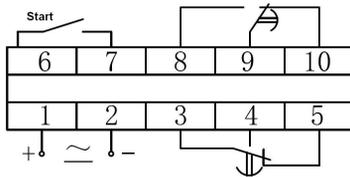


HHS15-G

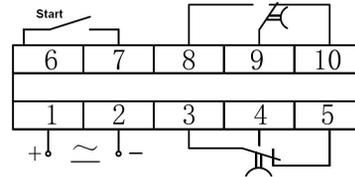


Operation time sequence



HHS15

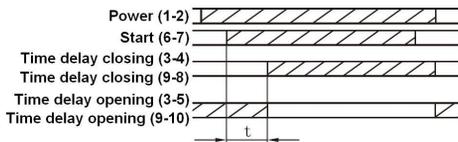

HHS15G

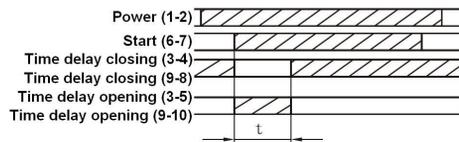


Dimension(mm) and Installation(mm)




Application


Samples01



Samples02



Samples03



Samples04

