

Description


HHS16F



Specification


Model	HHS16F
Rated Supply Voltage	AC24V, 36V, 110V, 220V, 380V 50Hz, DC24V (Operating voltage fluctuation range: 85% to 110% Ue)
Operating mode	0: Power on delay(Only 1 period of T1) 1: Release delay(Only 1 period of T1) 2: First action with infinite cycle time delay(With 2 period T1 and T2) 3: First no action with infinite cycle time delay(With 2 period T1 and T2) 4: First action with finite cycle time delay(With 2 period T1 and T2) 5: First no action with finite cycle time delay(With 2 period T1 and T2)
Time range	0.01s~9999h
Cycle times	1~9999 times
Adjustable benchmark time	0: 0.01s, 1: 0.1s, 2: 1s, 3: 1m, 4: 1h
Operate start sign	0: Reset n: The first count finished of the T1 period of the No. n(n=1~7) n.: The first count finished of the T2 period of the No. n(n=1~7)
Contact	8C NO contact
Rated Load of the Contact	Single circuit 3A AC220V(Resistive), the total capacity ≤ 10A AC220V(Resistive)
Electrical Life	100000 operations min. (3 A at 250 VAC/30 VDC, resistive load)
Installation	Flush mounting

Wiring Diagram

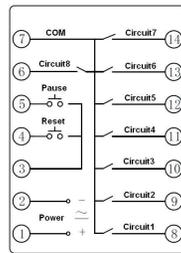


Operation time sequence


L mode

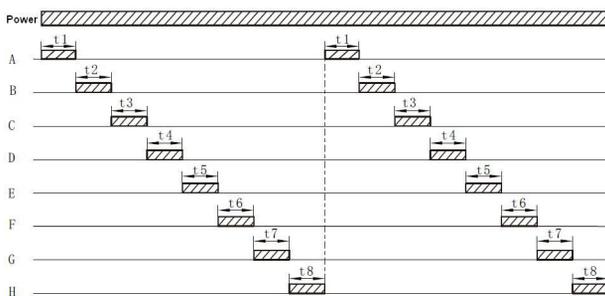

P mode

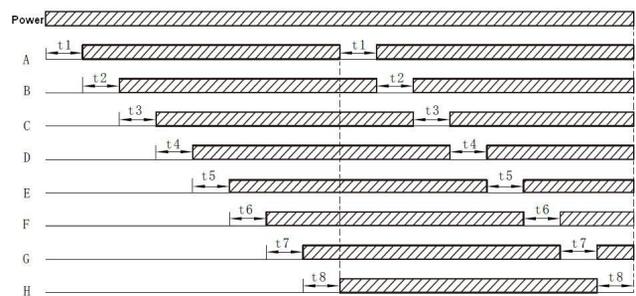


Dimension(mm) and Installation(mm)

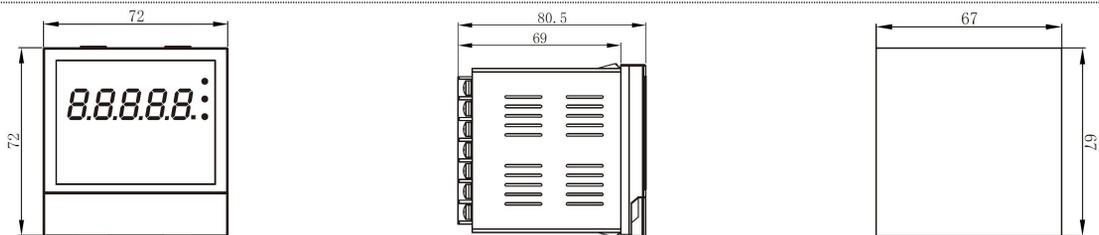


Application


Samples01

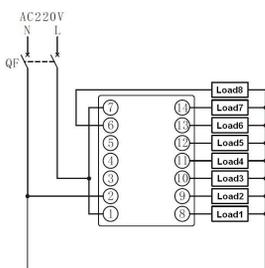

Samples02

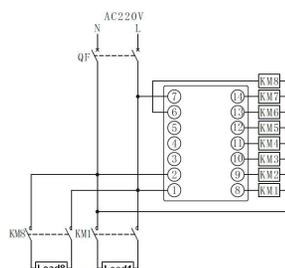

Samples03

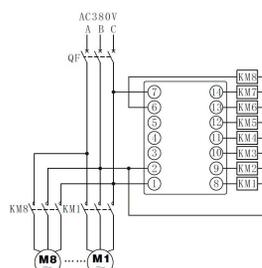

Samples04

