

ZIF Socket Series

KLS1-108M ZIP Strip Sockets 2.54mm(0.100")

Specification

Material:


- Housing: 30% Glass filled PBT UL 94V-0
- Contacts: Phosphor Bronze
- Plating: Gold plated: 3u" over 50u" nickel
- Tin plated: 100u" over 50u" nickel

Electrical Characteristics:


- Current rating: 1AMP.
- Insulator resistance: 5000MΩmin, at DC 500V
- Contact resistance: 20MΩmax, at DC 100mA
- Operating Temperature: -55°C~+105°C

Features:

- For DIPs with .070" lead spacing
- Lever actuated zero insertion force mechanism
- Socket easily disassembles for repair ability

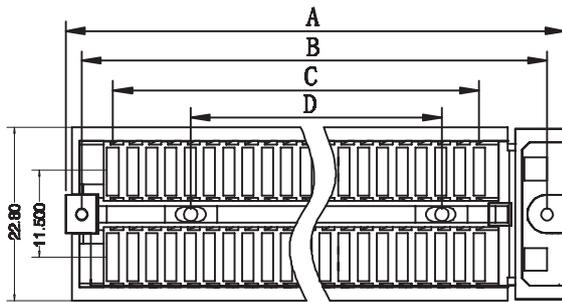

Positions	A	B	C	D
48	75.6	71.2	58.42	43.2
40	65.5	61.0	48.26	33.18
32	55.3	50.9	38.1	23.0
28	50.2	45.8	33.02	17.86
24	45.1	40.7	27.9	13.10

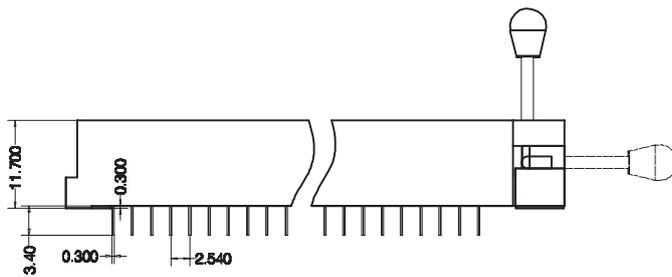

ORDER INFORMATION

Product No.: **KLS1-108M-24**

Pos. No. _____
ZIP Strip Sockets 2.54mm

Number of Contacts: 24-48Pin