

Tactile Switches

KLS7-TS4601 3.8x6.0 Normal Closed Type Tact Switchs

VII

Electrocal performance:





Rating:50mA. 12V DC
Insulation resistance:100MΩ min. 100V DC
Dielectric strength:250V AC for 1 min.
Contact resistance:100mΩ max.
Operating Temperature Range:-30°C to+85°C

Durability:

Lifetime:50000 Cycles

Mechanical performance:

Operating force: 250gf
Travel:0.25±0.1mm

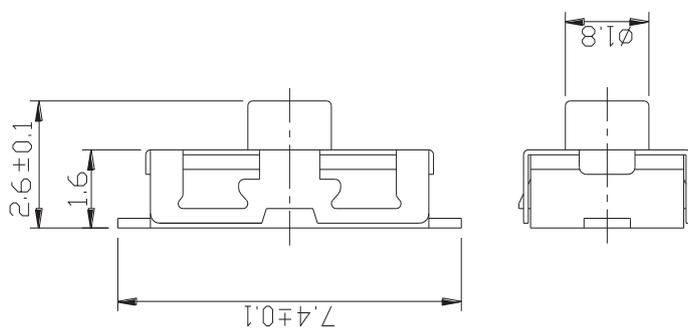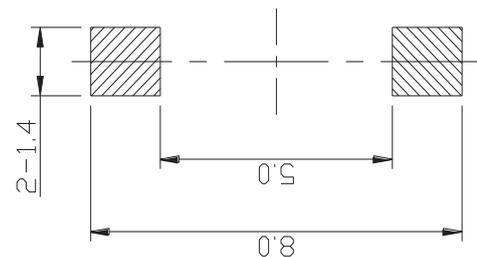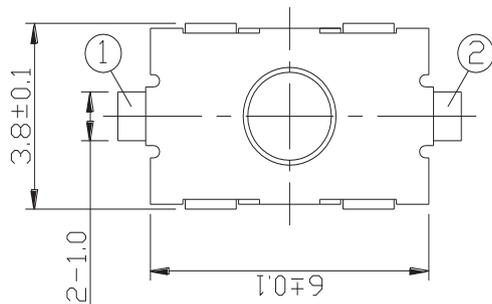

ORDER INFORMATION

KLS7-TS4601-2.6-250-T

Part Number _____ Packing: T=Tape
Hight: 2.6mm _____ Operating force: 250gf

