
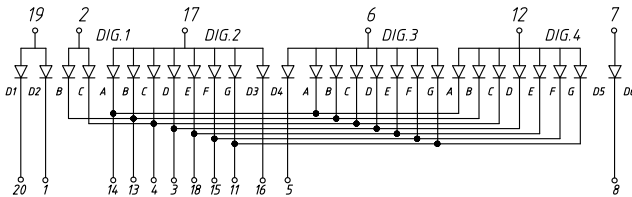


1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---

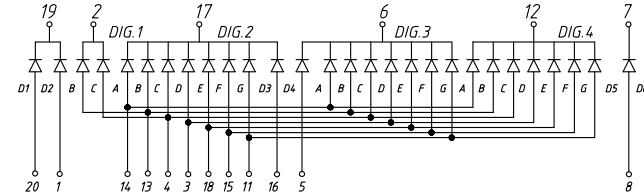

Order information

RoHS
Digit Mode
Character Height
Digit Number:
1-Single digit
2-Dual digit
3-Three digit
4-Four digit

Reflector surface color
Color Code:
Drive Mode:
Common Cathode
Common Anode
Model Number:

G	Maximum Ratings $T_a=25^{\circ}\text{C}$ (Derate above 25°C)												
	Characteristic	Test Condition	Symbol	Units	Ultra Red	Orange	Red	Amber	Yellow	Green	Pure Green	Blue	White
					UHR	UE	H	YO	UY	UG	PG	UB	UW
H	Pulse Forward Current Per Seg.	1/10 duty cycle 0.1ms Pulse width	I_{FP}	mA	100	100	50	100	100	100	100	100	100
	DC Forward Current Per Seg.		I_F	mA	30	30	15	30	30	30	30	30	30
	Reverse Current Per Seg.	$V_R=5V$	I_R	A	10	10	10	10	10	10	10	10	10
	Power Dissipation		P_D	mW	65×8	65×8	40×8	65×8	65×8	75×8	110×8	120×8	120×8

 H

1

2

3

4

5

6

7

8

A

B

C

D

E

F

G

H

PACKAGE DIMENSION mm

7.0

10.16

10°

4.4

14.0

8.38(0.33")

6.2

8.0

8.0

30.0

PIN.1

7.0

10.16

2.54×9=22.86

Ø5.1

INTERNAL CIRCUIT DIAGRAM

Common Cathode

L-KLS9-D-3341 Cx

Common Anode

L-KLS9-D-3341 Dx

Color Code	Emitting Color	Peak Wavelength nm	Forward Voltage V _F /Seg.		Luminous Intensity I _v /Seg.	
			Typ.	Max.	Min.	Typ.
		UHR	Ultra Red	640	2	2.5
UE	Orange	615	2	2.5	40	60
H	Red	623	2.25	2.5	0.4	0.8
YO	Amber	605	2	2.5	40	60
UY	Yellow	590	2	2.5	40	60
UG	Green	568	2.1	2.5	25	40
PG	Pure Green	525	3.3	3.8	150	200
UB	Blue	465	3.3	3.8	40	100
UW	White		3.3	3.8	200	500

Electro/Optical Characteristics I_F=20mA Ta=25°C

Order information

L-KLS9-D-33 4 1 C XX -X X

RoHS

Digit Mode

Character Height

Digit Number:

1-single digit

2-Dual digit

3-Three digit

4-Four digit

Reflector surface color

Color Code:

Drive Mode:

Common Cathode

Common Anode

Model Number:

Maximum Ratings Ta=25°C (Derate above 25°C)												
Characteristic	Test Condition	Symbol	Units	Ultra Red	Orange	Red	Amber	Yellow	Green	Pure Green	Blue	White
				UHR	UE	H	YO	UY	UG	PG	UB	UW
Pulse Forward Current Per Seg.	1/10 duty cycle 0.1ms Pulse width	I _{FP}	mA	100	100	50	100	100	100	100	100	100
DC Forward Current Per Seg.		I _F	mA	30	30	15	30	30	30	30	30	30
Reverse Current Per Seg.	V _R =5V	I _R	A	10	10	10	10	10	10	10	10	10
Power Dissipation		P _D	mW	65×8	65×8	40×8	65×8	65×8	75×8	110×8	120×8	120×8

Tolerance: ±0.25mm unless stated

PROJECTION

UNITS mm

SHEET SIZE A4

Draw data 2018-1-25

Check data 2018-1-25

Description: 0.33" Single Digit 7 Segment DISPLAYS

KLS P/N: L-KLS9-D-3341XXXXX

NingBo KLS ELECTRONIC CO.,L TD.