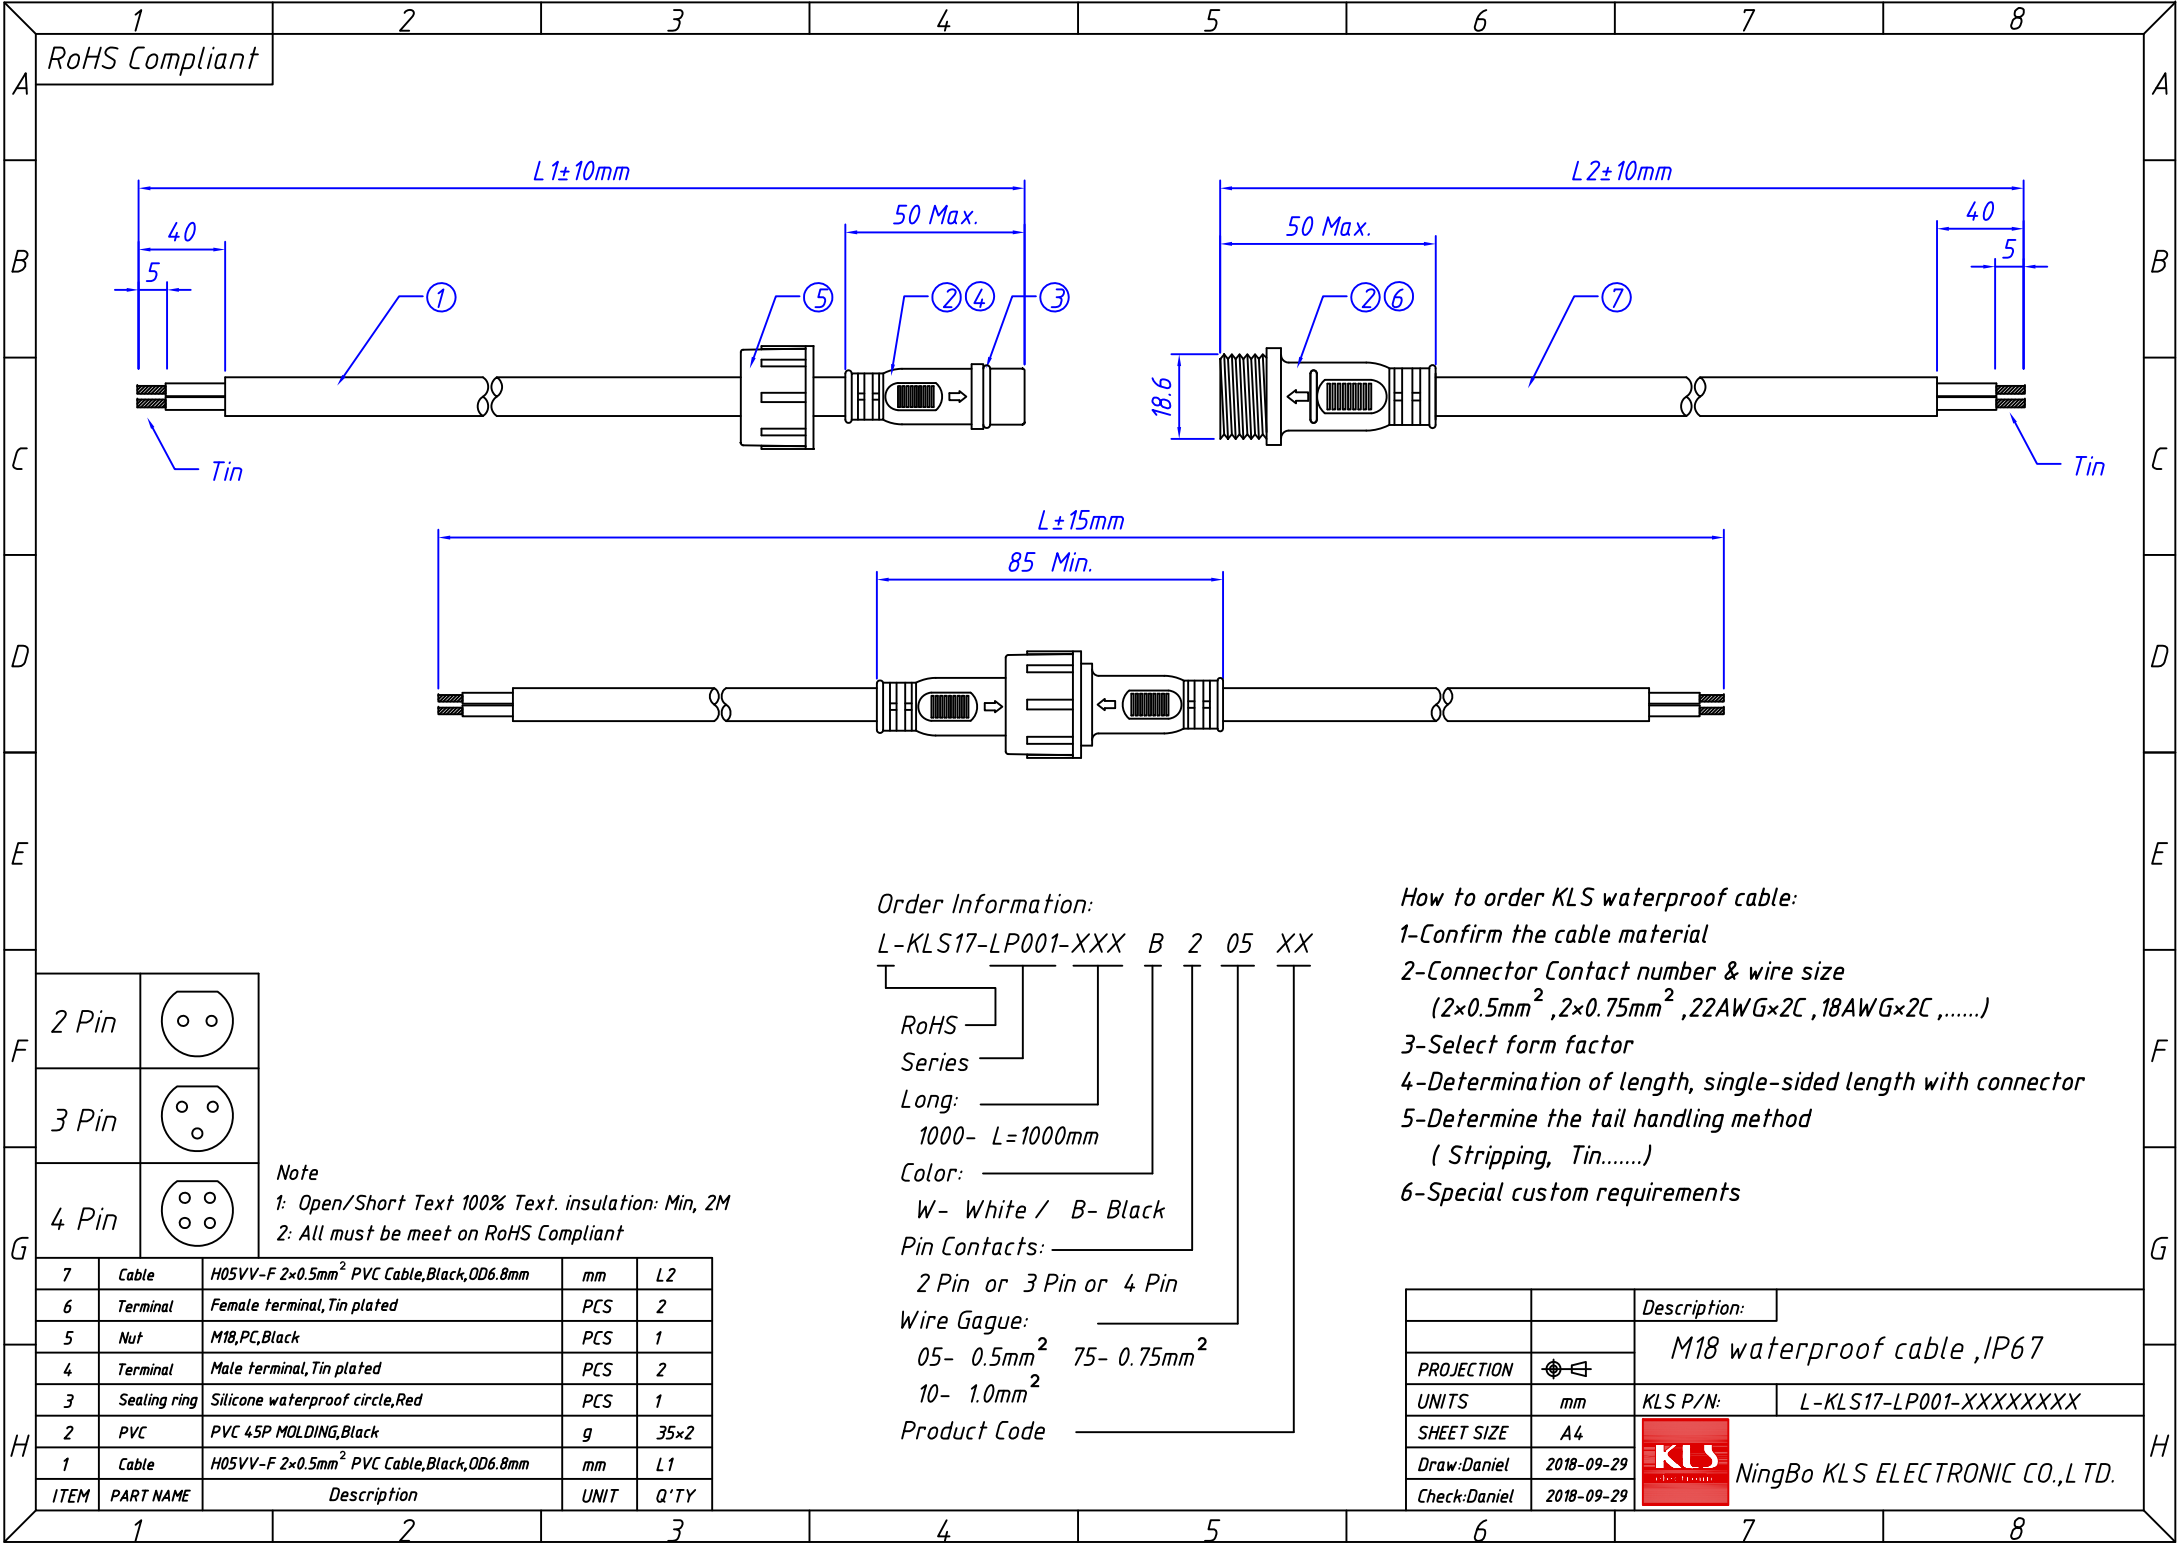


Note
1: Open/Short Text 100% Text. insulation: Min, 2M
2: All must be meet on RoHS Compliant

7	Cable	H05VV-F 2×0.5mm ² PVC Cable,Black,OD6.8mm	mm	L2
6	Terminal	Female terminal,Tin plated	PCS	2
5	Nut	M18,PC,Black	PCS	1
4	Terminal	Male terminal,Tin plated	PCS	2
3	Sealing ring	Silicone waterproof circle,Red	PCS	1
2	PVC	PVC 4SP MOLDING,Black	g	35×2
1	Cable	H05VV-F 2×0.5mm ² PVC Cable,Black,OD6.8mm	mm	L1
ITEM	PART NAME	Description	UNIT	Q'TY

Order Information:
L-KLS17-LP001-XXX B 2 05 XX
RoHS
Series
Long: 1000- L=1000mm
Color: W- White / B- Black
Pin Contacts: 2 Pin or 3 Pin or 4 Pin
Wire Gauge: 05- 0.5mm² 75- 0.75mm²
10- 1.0mm²
Product Code

- How to order KLS waterproof cable:
- 1-Confirm the cable material
 - 2-Connector Contact number & wire size
(2×0.5mm² ,2×0.75mm² ,22AWG×2C ,18AWG×2C ,.....)
 - 3-Select form factor
 - 4-Determination of length, single-sided length with connector
 - 5-Determine the tail handling method
(Stripping, Tin.....)
 - 6-Special custom requirements

		Description:	
		M18 waterproof cable ,IP67	
PROJECTION		KLS P/N:	L-KLS17-LP001-XXXXXXXXXX
UNITS	mm		
SHEET SIZE	A4		
Draw:Daniel	2018-09-29		NingBo KLS ELECTRONIC CO.,L TD.
Check:Daniel	2018-09-29		