


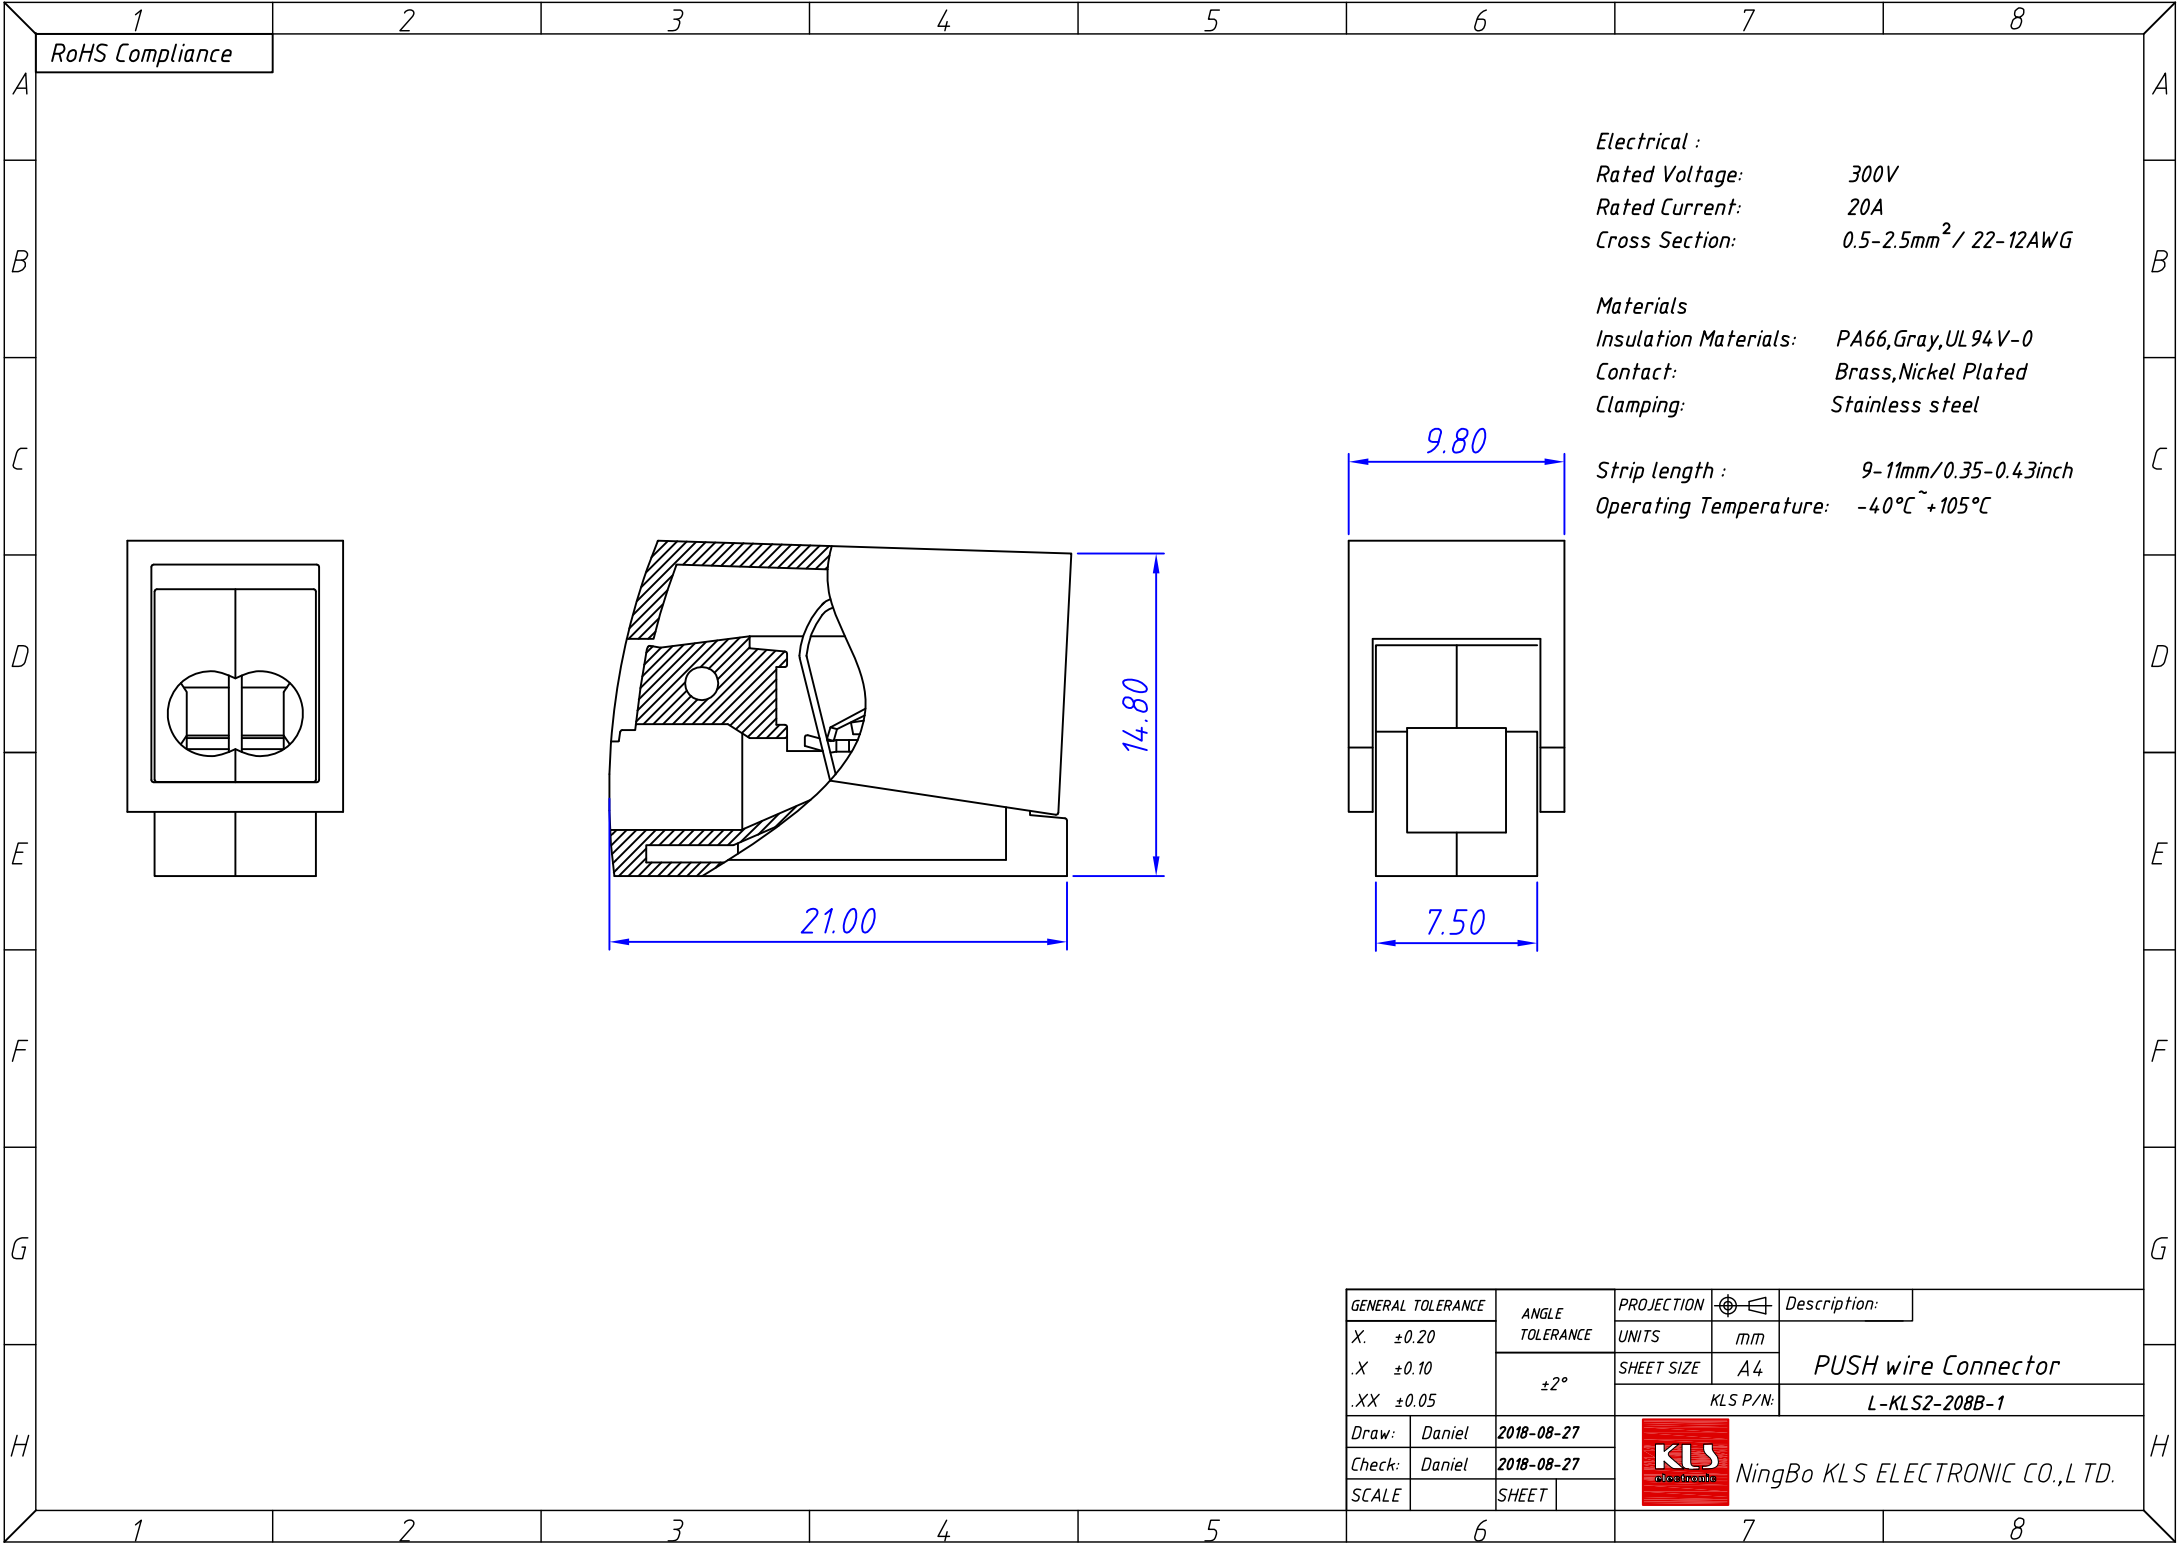

RoHS Compliance

Electrical :
Rated Voltage: 300V
Rated Current: 20A
Cross Section: 0.5-2.5mm² / 22-12AWG

Materials
Insulation Materials: PA66,Gray,UL 94 V-0
Contact: Brass,Nickel Plated
Clamping: Stainless steel

Strip length : 9-11mm/0.35-0.43inch
Operating Temperature: -40°C ~ +105°C

GENERAL TOLERANCE		ANGLE TOLERANCE	PROJECTION		Description:
X.	±0.20		UNITS	mm	PUSH wire Connector
.X	±0.10	±2°	SHEET SIZE	A4	
.XX	±0.05		KLS P/N:		L-KLS2-208B-1
Draw:	Daniel	2018-08-27	NingBo KLS ELECTRONIC CO.,L TD.		
Check:	Daniel	2018-08-27			
SCALE		SHEET			