
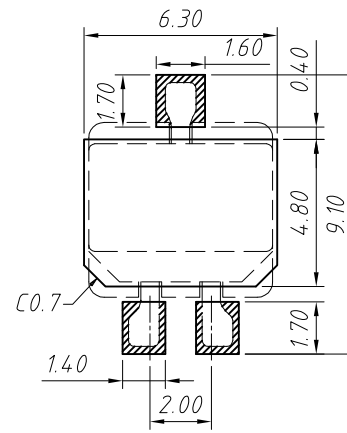
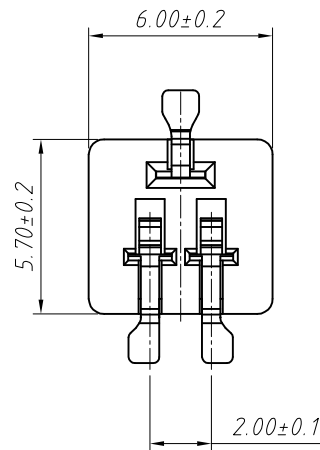
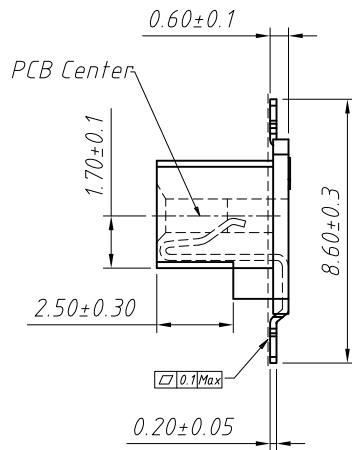


RoHS Compliant

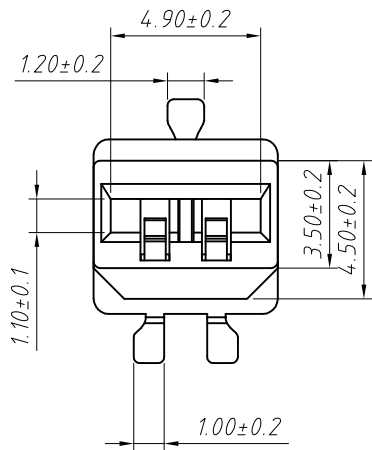



Board Layout
General Tolerance:±0.05

MATERIAL
Insulator:LCP,UL 94 V-0,Beige
Contacts:Phosphor Bronze,Tin-plated
Solder Tab:Phosphor Bronze,Tin-plated


Main Specifications
Thickness:1.0mm
Contact Resistance:≤20mΩ
Insulation Resistance:≥1000MΩ
Rated Voltage:250V AC DC
Rated Current:1.0A AC DC
Withstanding Voltage:800V AC/minute
Temperature Range: -40 °C ~ + 120° C

Order Information


L-KLS2- L61
Series No.
RoHS

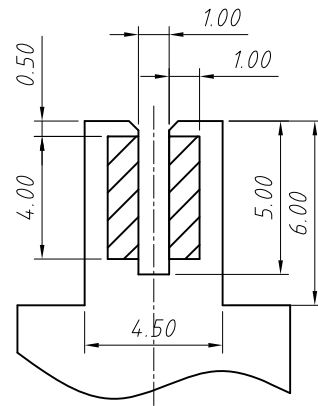

Mating PCB detail



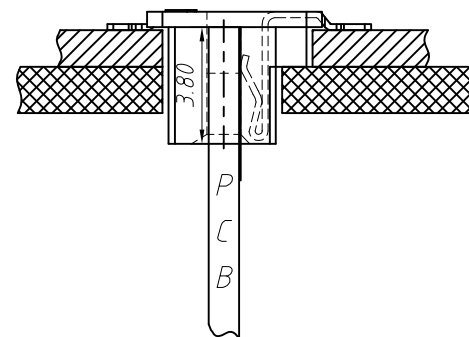


Assembly Layout





GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		Description:
X. ±0.15		X. ±5°		UNITS	mm	EDGE Connector for LED Lighting,pitch 2.5mm
.X ±0.03		.X ±3°		SHEET SIZE	A4	
.XX ±0.05		.XX ±2°			KLS P/N:	
Draw by:	Jenny	Date:	2018-03-10		NingBo KLS ELECTRONIC CO.,L TD.	
Check by:		Date:	2018-03-10			
SCALE		SHEET	1			


1 RoHS Compliant

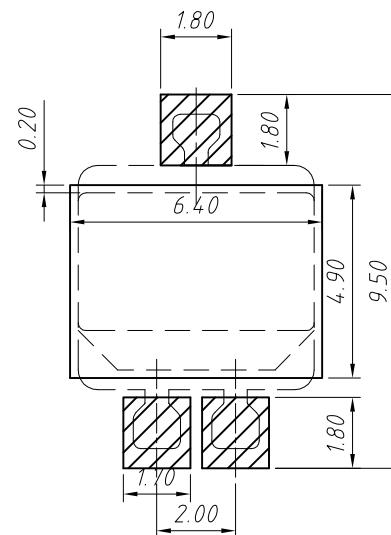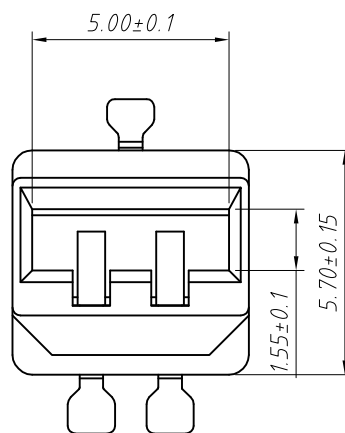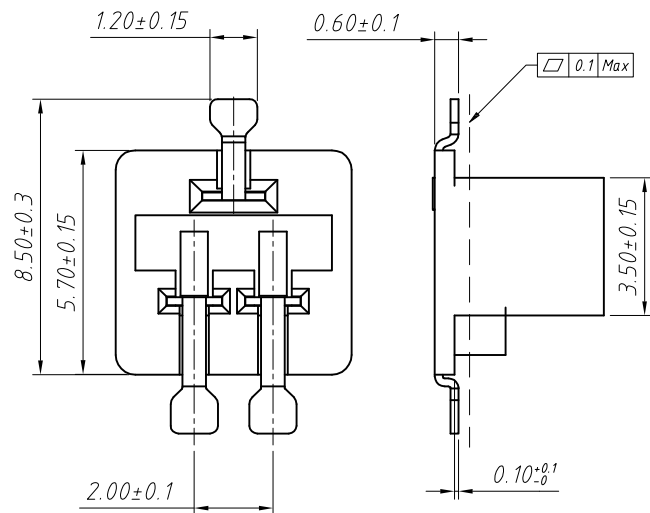

Board Layout
General Tolerance: ±0.05

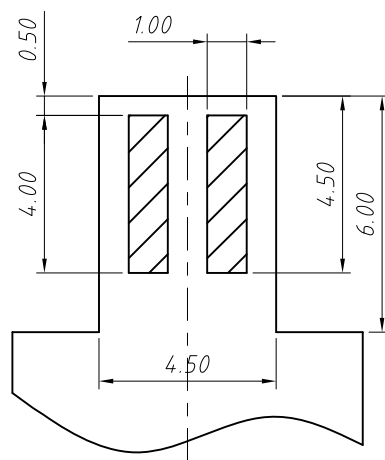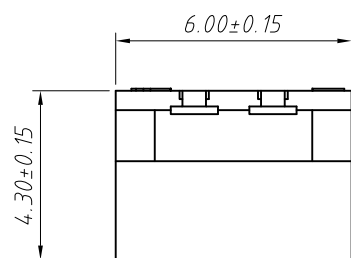

Mating PCB detail

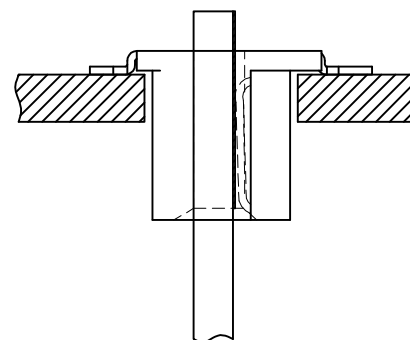

Assembly Layout

MATERIAL


Insulator: LCP, UL 94 V-0, Beige
Contacts: Phosphor Bronze, Tin-plated
Solder Tab: Phosphor Bronze, Tin-plated

Main Specifications

Thickness: 1.0mm
Contact Resistance: ≤20mΩ
Insulation Resistance: ≥1000MΩ
Rated Voltage: 250V AC DC
Rated Current: 1.0A AC DC
Withstanding Voltage: 800V AC/minute
Temperature Range: -40 °C ~ +120 °C

Order Information

L-KLS2- L61C
Series No.
RoHS



GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		Description:
X. ±0.15		X. ±5°		UNITS	mm	EDGE Connector for LED Lighting, pitch 2.5mm
.X ±0.03		.X ±3°		SHEET SIZE	A4	
.XX ±0.05		.XX ±2°			KLS P/N:	
						L-KLS2-L61C
Draw by:	Jenny	Date:	2018-03-10	 NingBo KLS ELECTRONIC CO.,LTD.		
Check by:		Date:	2018-03-10			
SCALE		SHEET	1 OF 1			