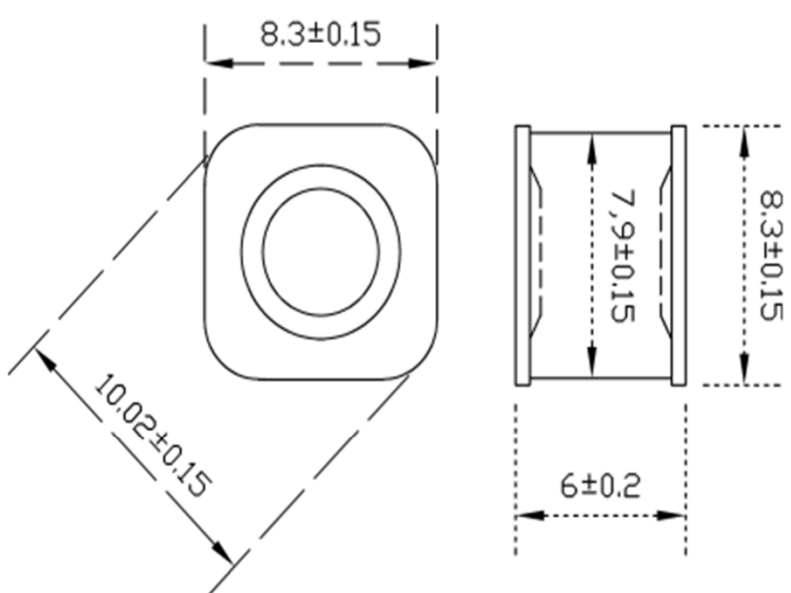


1		2		3		4		5		6		7		8														
A	RoHS Compliance		Nominal DC Spark-over voltage	Deviation of VS	Impulse spark-over voltage	Impulse spark-over voltage	Impulse discharge current	Impulse discharge current	Impulse discharge current	Alternating discharge current	Insulation resistance	Capacitance																
	P/N																											
B			100V/s		100V/μs	1KV/μs	10/350μs 1cycles	8/20μs 10cycles	10/1000μs	50Hz 5 cycles		1MHz																
			V	V	V	V	KA	KA	A/cycles	A	Ω	pF																
C	L-KLS5-GDT8060-075		75	±25%	≤500	≤600	4	20	200/300	20	≥10 ⁸	< 1.3																
	L-KLS5-GDT8060-090		90	±20%	≤500	≤600	4	20	200/300	20	≥10 ⁸	< 1.3																
	L-KLS5-GDT8060-150		150	±20%	≤500	≤650	4	20	200/300	20	≥10 ⁹	< 1.3																
	L-KLS5-GDT8060-230		230	±20%	≤600	≤700	4	20	200/300	20	≥10 ⁹	< 1.3																
	L-KLS5-GDT8060-250		250	±20%	≤600	≤750	4	20	200/300	20	≥10 ⁹	< 1.3																
	L-KLS5-GDT8060-350		350	±20%	≤800	≤900	4	20	200/300	20	≥10 ⁹	< 1.3																
D	L-KLS5-GDT8060-500		500	±20%	≤1100	≤1200	4	20	200/300	20	≥10 ⁹	< 1.3																
	L-KLS5-GDT8060-600		600	±20%	≤1200	≤1300	4	20	200/300	20	≥10 ⁹	< 1.3																
E																												
F																												
G																												
H																												
1		2		3		4		5		6		7		8														

PROJECTION		Description:		8.3x8.3x6.0mm SMD GAS DISCHARGE TUBE									
													
UNITS	mm	KLS P/N:		L-KLS5-GDT8060-XXX									
SHEET SIZE	A4												
Draw:	Daniel	2020-06-29		 NingBo KLS ELECTRONIC CO.,LTD.									
Check:	Daniel	2020-06-29											