

CRYSTAL UNIT

KLS14-JU-308

Application

- Clock and Microcomputer

Features

- Dimensions (3.0×8.0mm)
- Exellent Reliability Performance.




Specifications



Model	KLS14-JU-308
Nominal frequency range	32.768KHz
Crystal cut	Fundamental [AT-cut]
Storage temperature range	-40°C~+85°C
Operating temperature range	-20°C~+70°C, -40°C~+85°C
Frequency temperature characteristics (Ref. to +25°C)	$\pm 20 \times 10^{-6}$, or specify
Frequency tolerance (at +25°C)	$\pm 10 \times 10^{-6}$, $\pm 20 \times 10^{-6}$, $\pm 30 \times 10^{-6}$, or specify
Equivalent series resistance	50K Ω max.
Load capacitance	12.5pF, or specify
Shunt capacitance	1.6pF max.
Level of drive	1.0 μ W max.

Package quantity: 1,000pcs /Bag

Outline and Dimensions [unit:mm]

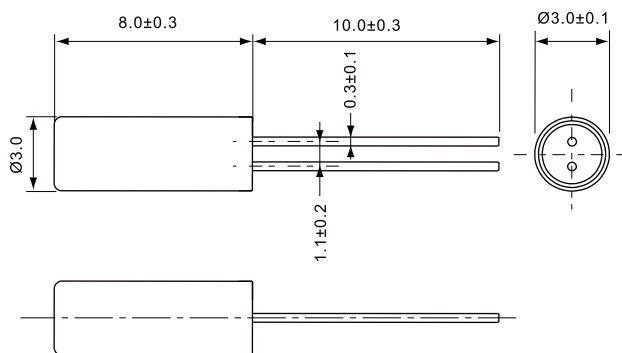

ORDER INFORMATION

L-KLS14-JU-308 -XXXX- XX-XX-X

Operating Temperature:	B: -20°C~+70°C C: -40°C~+85°C
Frequency Tolerance:	15=15ppm
Load Capacitance:	12.5=12.5pF
Frequency:	32.768=32.768KHz
RoHS	