
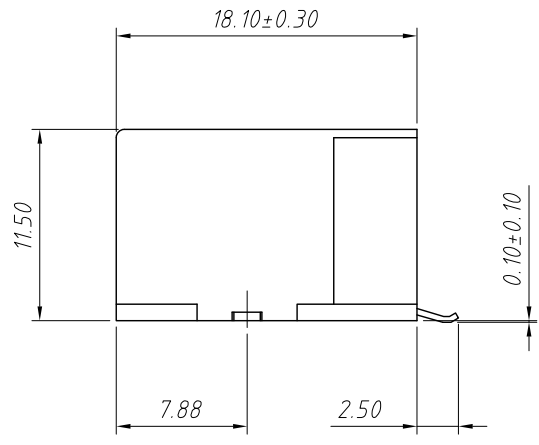


1
RoHS Compliance

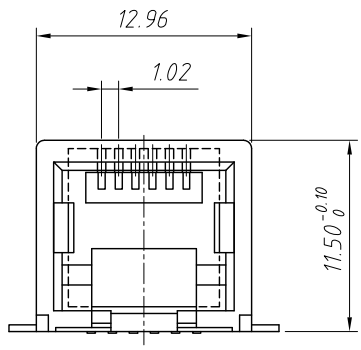



- Electrical:**
- 1.Voltage Rating:125VAC
 - 2.Current Rating:1.5A
 - 3.Contact Resistance:40mΩ Max.
 - 4.Insulation Resistance:1000MΩ Min.@500VDC
 - 5.Withstanding Resistance:1000VAC RMS.50Hz 1minute

- Materials:**
- 1.Housing:High Temp. Thermoplastic Flammability,UL 94 V-0
 - 2.Contact: Phosphor Bronze
 - 3.Plating:Gold Plating over nickel in contact, Tin Planting over nickel in solder area

- Mechanical:**
- 1.Durability:750 cycles Min.
 - 2.PCB Retention pre-solder:1 LB Min.

- Environmental:**
1. Storage:-40°C ~ +85°C
 2. Operation:-20°C ~ +75°C

P.C.B Layout (Top View)

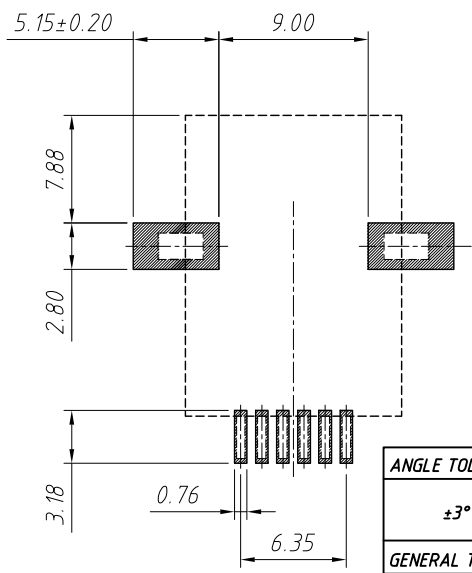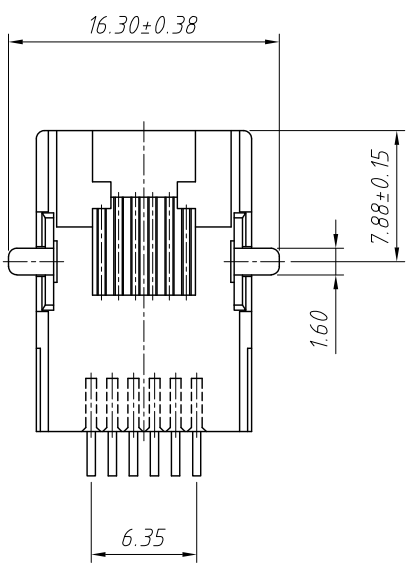

- Order Information:**
- L-KLS12-SMT15-6P6C-N-XX-P
- L: RoHS
 - SMT series
 - Point No:6P6C
 - Shield Code:
 - N-Without Shield
 - Plating:
 - 01:Fu"Gold 02:3u"Gold 03:6u"Gold
 - 04:15u"Gold 05:30u"Gold
 - Packing:R-Reel P-Blister Tray

ANGLE TOLERANCE	PROJECTION	Description:	RJ12-6P6C SMD Jack Horizontal, Without Shielded
±3°			
GENERAL TOLERANCE	UNITS	mm	KLS P/N:
x.x ±0.30	SHEET SIZE	A4	L-KLS12-SMT15-6P6C-N-XX-P
x.xx ±0.20	Draw:Jenny	Daniel	2021-08-01
x.xxx ±0.10	Check:Daniel	Daniel	2021-08-01

