
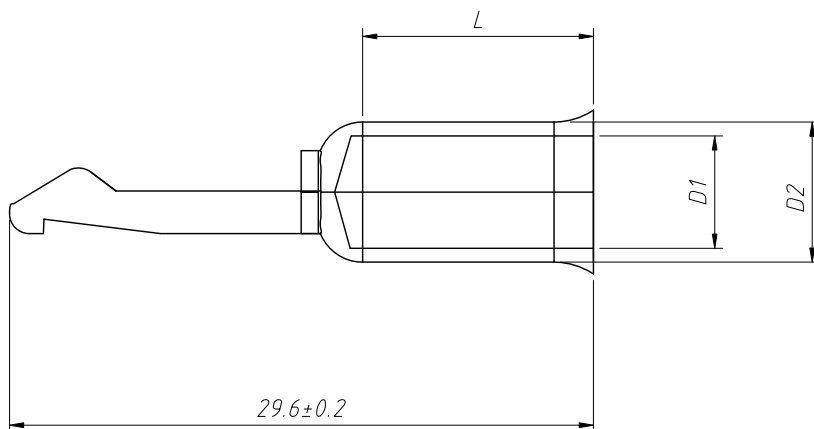


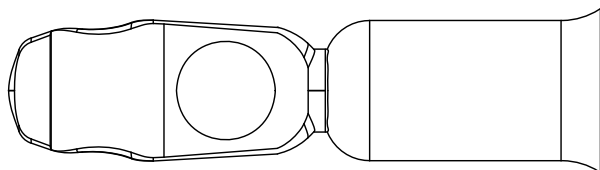

Material:
Terminal:Red Copper,Silver Plated

Electrical Characteristics:
Rated Current:50A
Rated Voltage:600V

Applicable Housing :
L-KLS1-XT27-H
L-KLS1-XT27D-H
L-KLS1-XT28-H
L-KLS1-XT28D-H

Part Number	D1 (mm)	D2 (mm)	L (mm)	Wire
L-KLS1-XT27-T2	3.7±0.20	7.0±0.20	12.0±0.20	10/12 AWG
L-KLS1-XT27-T	4.7±0.20	7.0±0.20	12.0±0.20	8AWG
L-KLS1-XT27-T1	5.6±0.20	7.0±0.20	12.0±0.20	6AWG

Order Information:
L-KLS1-XT27-T
L: RoHS
XD Series
Type:
T / T1 / T2-Terminal

ANGLE TOLERANCE		PROJECTION		Description:	
±3°				Terminal 50A Automobile connector	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	L-KLS1-XT27-T
x.x	±0.30	SHEET SIZE	A4		 NingBo KLS ELECTRONIC CO.,L TD.
x.xx	±0.20	Draw:	Daniel	2022-04-02	
x.xxx	±0.10	Check:	Daniel	2022-04-02	



NingBo KLS ELECTRONIC CO.,LTD.