

AV-F4020



SIZE:

40x40x20mm

construction:

Glass Fiber reinforced plsatic;
Impeller and housing PBT

OPERATING TEMPERATURE:

Sleeve bearing -10°C to +70°C

INSULATION RESISTANCE:


10meg Ohm min, at 500 VDC
(between frame and terminal)

DIELECTRIC STRENGTH:


5mA max, at 500 VAC 60Hz one minute
(between frame and terminal)

| Dimensions Drawing

Unit:mm

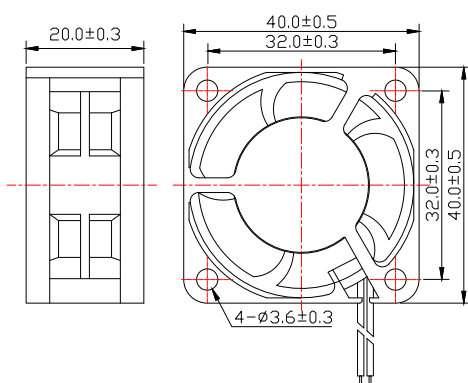

| Characteristic Curves

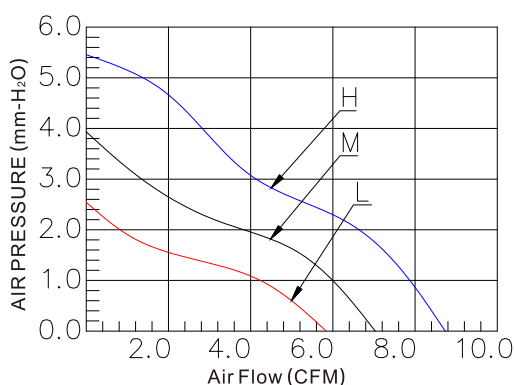

| Specifications

Carton Specifications (Unit: cm):36x32x23 QTY:600pcs GW:13.83Kg

Model	Bearing Type	Rated Voltage	Operation Voltage	Current	Speed	Air Flow	Static Pressure	Noise Level	Weight
		VDC	VDC	A	RPM	CFM	mmH ₂ O	dBA	g
AV-F4020HS05	Sleeve	5	4.5~5.5	0.26	7500	8.60	5.58	33.60	21.88
AV-F4020MS05	Sleeve	5	4.5~5.5	0.20	6200	7.10	3.98	29.07	21.88
AV-F4020LS05	Sleeve	5	4.5~5.5	0.14	5000	5.70	2.54	23.46	21.88
AV-F4020HB05	Ball	5	4.5~5.5	0.26	7500	8.60	5.58	33.60	21.88
AV-F4020MB05	Ball	5	4.5~5.5	0.20	6200	7.10	3.98	29.07	21.88
AV-F4020LB05	Ball	5	4.5~5.5	0.14	5000	5.70	2.54	23.46	21.88
AV-F4020HS	Sleeve	12	10.8~13.2	0.15	7500	8.60	5.58	33.60	21.88
AV-F4020MS	Sleeve	12	10.8~13.2	0.11	6200	7.10	3.98	29.07	21.88
AV-F4020LS	Sleeve	12	10.8~13.2	0.07	5000	5.70	2.54	23.46	21.88
AV-F4020HB	Ball	12	10.8~13.2	0.15	7500	8.60	5.58	33.60	21.88
AV-F4020MB	Ball	12	10.8~13.2	0.11	6200	7.10	3.98	29.07	21.88
AV-F4020LB	Ball	12	10.8~13.2	0.07	5000	5.70	2.54	23.46	21.88