

AV-F14025



SIZE:

140x140x25mm

construction:

Glass Fiber reinforced plastic;
Impeller and housing PBT

OPERATING TEMPERATURE:

Sleeve bearing -10°C to +70°C

INSULATION RESISTANCE:


10meg Ohm min, at 500 VDC
(between frame and terminal)

DIELECTRIC STRENGTH:


5mA max, at 500 VAC 60Hz one minute
(between frame and terminal)

| Dimensions Drawing

Unit:mm

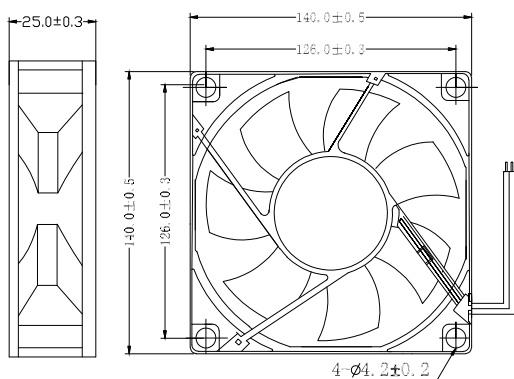

| Characteristic Curves

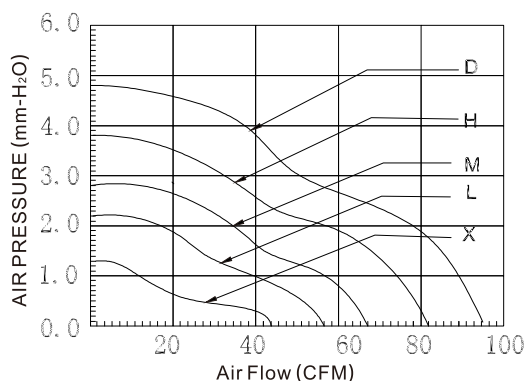

| Specifications

Carton Specifications (Unit: cm):65.5x30x31 QTY:100pcs GW:14.8Kg

Model	Bearing Type	Rated Voltage	Operation Voltage	Current	Speed	Air Flow	Static Pressure	Noise Level	Weight
		VDC	VDC	A	RPM	CFM	mmH ₂ O	dBA	g
AV-F14025HS	Sleeve	12	10.8~13.2	0.60	3000	119.49	7.81	44.47	137
AV-F14025MS	Sleeve	12	10.8~13.2	0.35	2000	107.54	6.66	41.51	137
AV-F14025LS	Sleeve	12	10.8~13.2	0.20	1000	79.66	5.26	39.98	137
AV-F14025HB	Ball	12	10.8~13.2	0.60	3000	119.49	7.81	44.47	137
AV-F14025MB	Ball	12	10.8~13.2	0.35	2000	107.54	6.66	41.51	137
AV-F14025LB	Ball	12	10.8~13.2	0.20	1000	79.66	5.26	39.98	137
AV-F14025HS24	Sleeve	24	21.6~26.4	0.40	3000	119.49	7.81	44.47	137
AV-F14025MS24	Sleeve	24	21.6~26.4	0.25	2000	107.54	6.66	41.51	137
AV-F14025LS24	Sleeve	24	21.6~26.4	0.15	1000	79.66	5.26	39.98	137
AV-F14025HB24	Ball	24	21.6~26.4	0.40	3000	119.49	7.81	44.47	137
AV-F14025MB24	Ball	24	21.6~26.4	0.25	2000	107.54	6.66	41.51	137
AV-F14025LB24	Ball	24	21.6~26.4	0.15	1000	79.66	5.26	39.98	137