

axial rectifier diode

CURRENT 1.5 Ampere
VOLTAGE RANG 50 to 1000 Volts

RL151 THRU RL157


FEATURES

- Low coat construction
- Low forward voltage drop
- Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed:
260 /10 secods/.375 (9.5mm)lead length at 5 lbs(2.3kg) tension

MECHANICAL DATA

- Case: Transfer molded plastic
- Epoxy: UL94V-O rate flame retardant
- Polarity: Color band denotes cathode end
- Lead: Plated axial lead, solderable per MIL-STD-202E method 208C
- Mounting position: Any
- Weight: 0.014 ounce, 0.39 grams

DO-15\DO-204AC

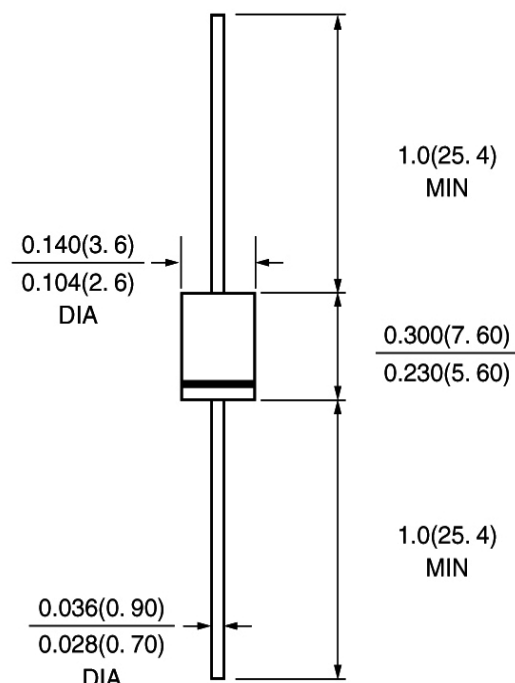

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

		SYMBOLS	RL151	RL152	RL153	RL154	RL155	RL156	RL157	UNIT
Maximum Repetitive Peak Reverse Voltage		V _{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage		V _{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage		V _{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current 0.375 (9.5mm) lead length at T _A = 50		I _(AV)	1.5							Amps
Peak Forward Surge Current 8.3mS single half sine wave superimposed on rated load (JEDEC method)		I _{FSM}	30							Amps
Maximum Instantaneous Forward Voltage @ 1.5A		V _F	1.1							Volts
Maximum DC Reverse Current at Rated DC Blocking Voltage per element	T _A = 25	I _R	5.0							μA
	T _A = 100		50							
Maximum Full Load Reverse Current, full cycle average 0.375 (9.5mm)lead length at T _L =75		I _{R(AV)}	30							μA
Typical Junction Capacitance (Note 1)		C _J	20							pF
Typical Thermal Resistance (Note 2)		R _{θJA}	50							/W
Operating Junction Temperature Range		T _J	-55 to +150							
Storage Temperature Range		T _{STG}	-55 to +150							

Notes:

1. Measured at 1.0MHz and Applied Reverse Voltage of 4.0V DC.
2. Thermal Resistance from junction to Ambient at .375 (9.5mm)lead length, P.C.board mounted.

axial rectifier diode

CURRENT 1.5 Ampere
VOLTAGE RANG 50 to 1000 Volts

RL151 THRU RL157

RATING AND CHARACTERISTIC CURVES RL151 Thru RL157

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

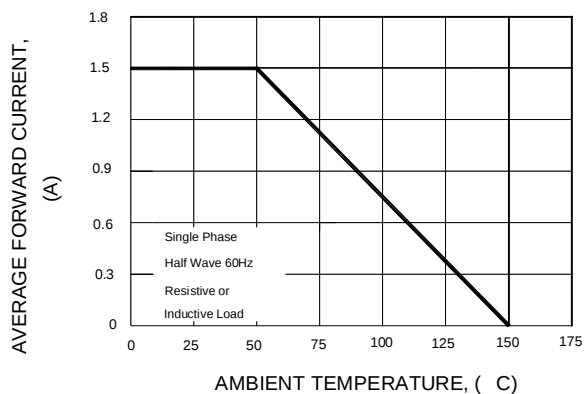


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

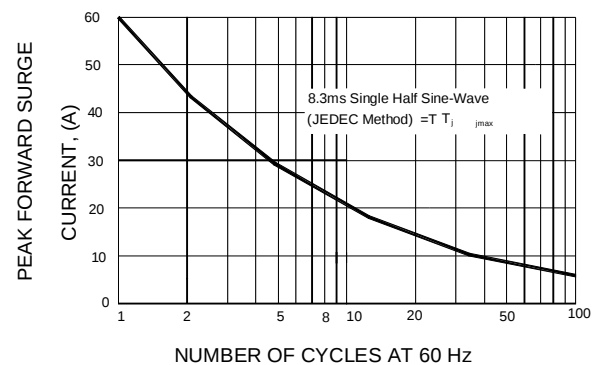


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

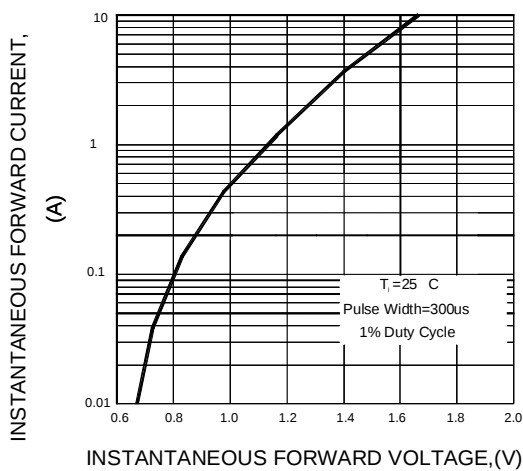


FIG.4-TYPICAL REVERSE CHARACTERISTICS

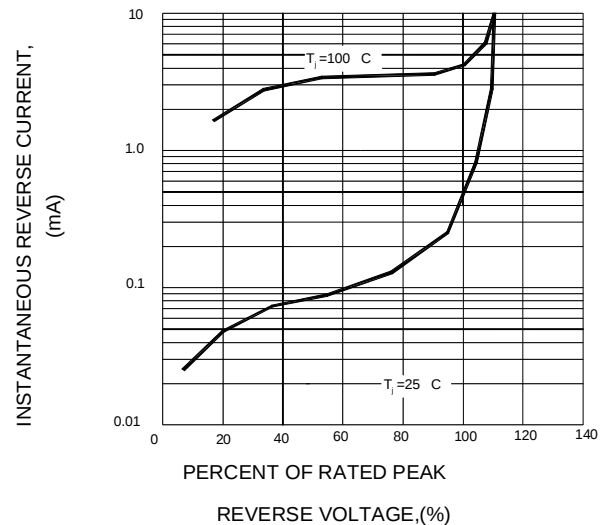


FIG.5-TYPICAL JUNCTION CAPACITANCE

