
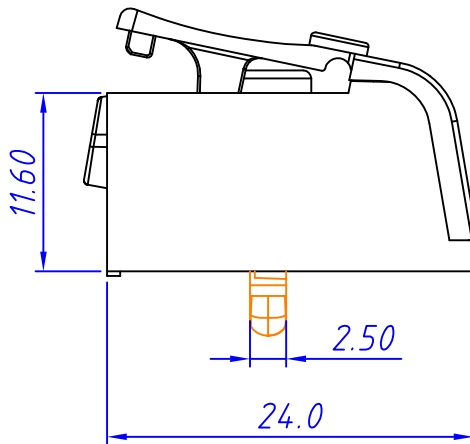
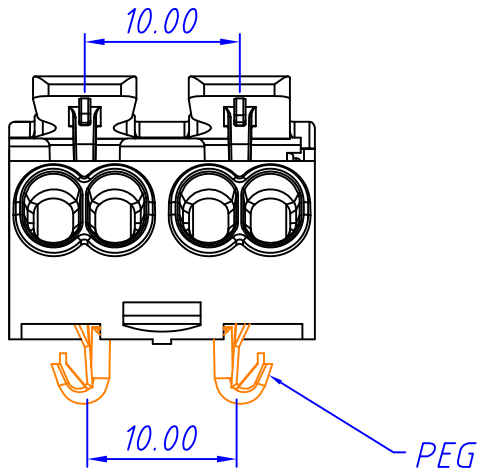


1 RoHS Compliance

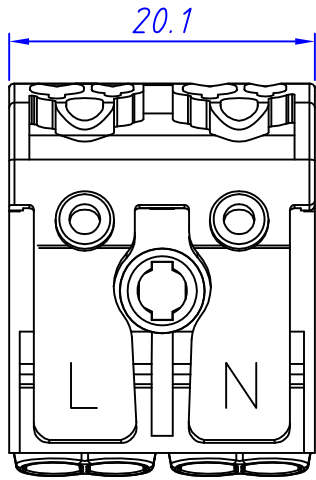

Electrical :

Rated Voltage: 450V(IEC/ENI)/300V(UL)

Rated Current: 16A

Contact resistance: 20 mΩ

Insulation resistance: 5000MΩ/DC1000V

Withstanding voltage : AC2500V/1 min

Cross Section: Solid conductor & Stranded conductor

A holes: 0.5-2.5mm²/14-20AWG

B holes: 0.5-1.5mm²/16-20AWG

C holes: 0.5-2.5mm²/14-20AWG

Materials

Insulation Materials: PA 66,WHITE,UL94V-2

Contact: Copper,Nickel Plated

Wire guard : Stainless steel


Number of poles: 2 poles


Strip length : 8-10mm

Operating Temperature: -40°C~+105°C

ORDER INFORMATION

L-KLS2- 238K - 02P X A

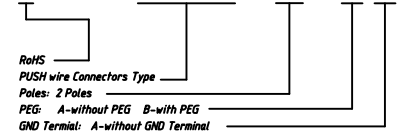

GENERAL TOLERANCE		ANGLE TOLERANCE	PROJECTION	Description:
X. ±0.60	±2°	UNITS	mm	PUSH wire Connector
.X ±0.38		SHEET SIZE	A4	
.XX ±0.25		KLS P/N:		L-KLS2-238K-02Pxx
Draw: Daniel	2018-08-27	 NingBo KLS ELECTRONIC CO.,L TD.		
Check: Daniel	2018-08-27			
SCALE	SHEET			