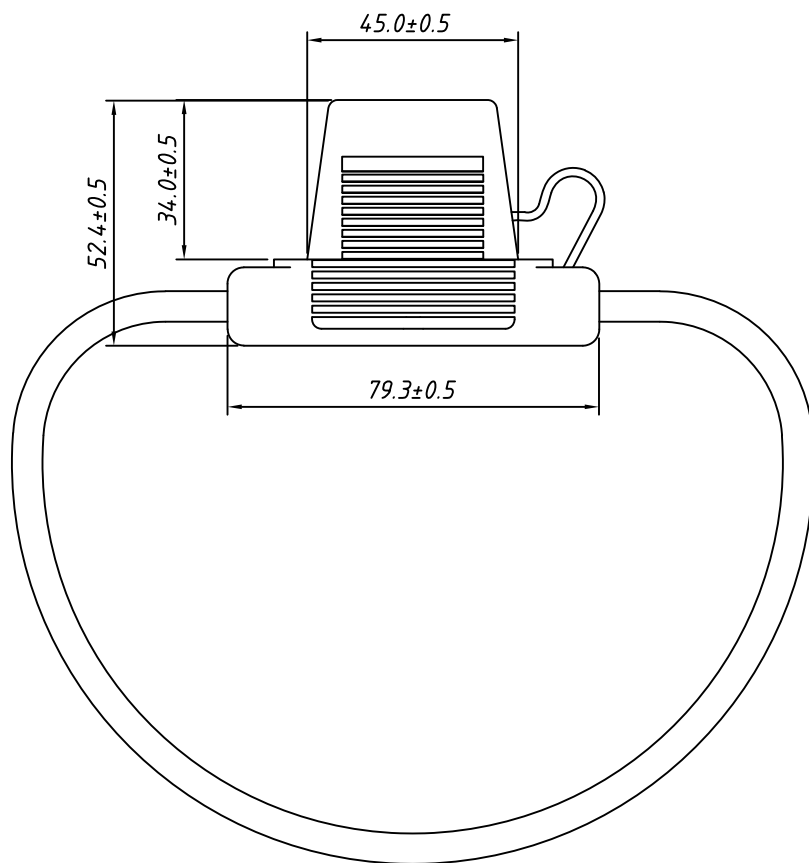



Characteristics:

Voltage Rating: 32V

Current Rating: 60A Max.

Insulation Resistance: 100MΩ Min. at 500VDC

Dielectric Strength : AC 1000 V Min.at 60s

Fuse type:

Medium Blade Fuse: KLS5-193N-xxx

Order Information:

L - KLS5 - 712 -XX R xxx

L: RoHS

Wire AWG:

06- 6AWG for 100A Max.

08- 8AWG for 70A Max.

10- 10AWG for 50A Max.

Cable Color: R- Red

Cable Long: 300-300mm

3	Cable	UL 1015 PVC Cable 12~20AWG Red,L=300mm	1
2	Terminal	Female Terminal,Brass T=0.5mm,Nickel Plated	2
1	Housing	Housing For Fuse,PVC,Black	1
Item	P/N	Describe&Material	Q'ty

GENERAL TOLERANCE	PROJECTION		Description:
X. ±1.00	UNITS	mm	Maxi Blade Fuse Holder With Cable
.X ±0.50	Draw by:	Daniel	KLS P/N: L-KLS5-712-xxR300
.XX ±0.30	Check by:	Daniel	
ANGLE TOLERANCE	Date	2022-09-01	
±5°	SHEET	1 OF 1	



NingBo KLS ELECTRONIC CO.,L TD.